

Simone Walker

From: Wayne Wanamaker <wwanamaker@coastappliances.com>
Sent: December 16, 2021 3:46 PM
To: Simone Walker
Cc: 'Guillaume Coeur'
Subject: Lot 345W Innisfil appliances specs
Attachments: 18 inch freezer.pdf; 36 inch dual fuel range.pdf; 36 inch fridge.pdf; Avanti WCF154S3SD wine fridge.pdf; DW/HD650WFP.pdf; MC30WP speed oven.pdf; ph36hs.pdf; WFW6620HC-specsheet-EN (1).pdf; VWED6620HC-specsheet-EN.pdf

Hello Simone, I finalized the appliance upgrade package for Lot 345W today. Here are the specs for all of the appliances. Also here are some notes for your consideration and please if you have any questions please contact me.

- * Fridge and freezer columns- the Thermador handles are ordered for these 2 pieces. The purchaser is doing cabinetry panels for them
- * Hood fan- this is an under cabinet style so they will require a cabinet above the hood.


Thanks
Wayne

345W

T36IR9055P

36-INCH BUILT-IN FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY

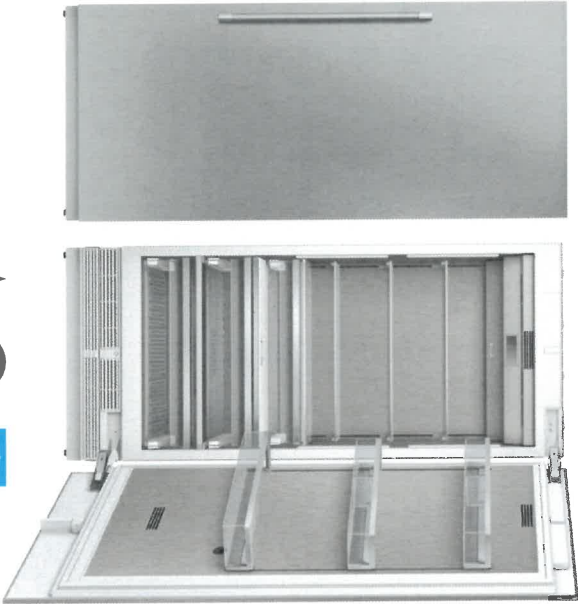

FEATURES & BENEFITS

- Full Stainless Steel Inner Liner
- Freedom® Hinge enables true flush design
- Auto Door Opening provides the opening of the door with just a slight push or pull
- ThernaFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

Refrigerator	36°F (2°C) to 46°F (8°C)
Temperature Controlled Drawer	30°F (-1°C) to 38°F (3°C)
SuperCool	36°F (2°C) for approximately 6 hours
Energy Saving (Economy) Mode	43°F (6°C)

GENERAL PROPERTIES

Home Connect™ (Wi-Fi Enabled)	Yes
Panel Ready	Yes
Reversible Door Swing	Yes
SoftClose® Door	Yes
SoftClose® Drawers	Yes
Carbon Air Filter	Yes
Lighting	LED Sidewall and Theater Lighting
Refrigerator Shelves	4
Adjustable Shelves	3
Shelf Material	Glass w/Aluminum Profile
Full Extension Drawers @ 115° Door Opening Angle	Yes
Full Extension Drawers @ 90° Door Opening Angle	Yes
General Use Drawer	1
Humidity Managed Drawer	1
Temperature Controlled Drawer	1
Door Bins	3
Gallon Door Bins	1
Door Open Alarm	Yes
Open Door Assist	Yes
Special Modes	Sabbath, Economy, Vacation

CAPACITY

Total Capacity (cu. ft.)	20.6 cu. ft.
--------------------------	--------------

PERFORMANCE

Dedicated Evaporator & Compressor System	Yes
Freeflow® Cold Air System	Yes
SuperCool	Yes

TECHNICAL DETAILS

Watts (W)	350 W
Current (A)	15 A
Volts (V)	110-120 V
Frequency (Hz)	60 Hz
Power Cord Length (in.)	118
Plug Type	120V-3 Prong

DIMENSIONS & WEIGHT

Appliance Dimensions (H x W x D) (in.)	83 3/4" x 35 3/4" x 24"
Required Cutout Size (H x W x D) (in.)	84" x 36" x 25"
Net / Gross Weight (lbs)	406 / 449 lbs

EFFICIENCY

ENERGY STAR® Certified	Yes
Annual Energy Consumption	312 kWh

*Height adjustable + / -1/2" (+ / -13 mm)

Panel required

Dec 17/24

345W

1 of 24

T36IR905SP
36-INCH BUILT-IN FRESH FOOD COLUMN
FREEDOM® COLLECTION, PANEL-READY




WARRANTY


Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
Limited Warranty for Sealed Refrigeration System*, Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System*, Parts Only	7th to 12th Year
Limited Warranty for Stainless Steel Rust-Through	Lifetime

*Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

CUTOUT DIMENSIONS

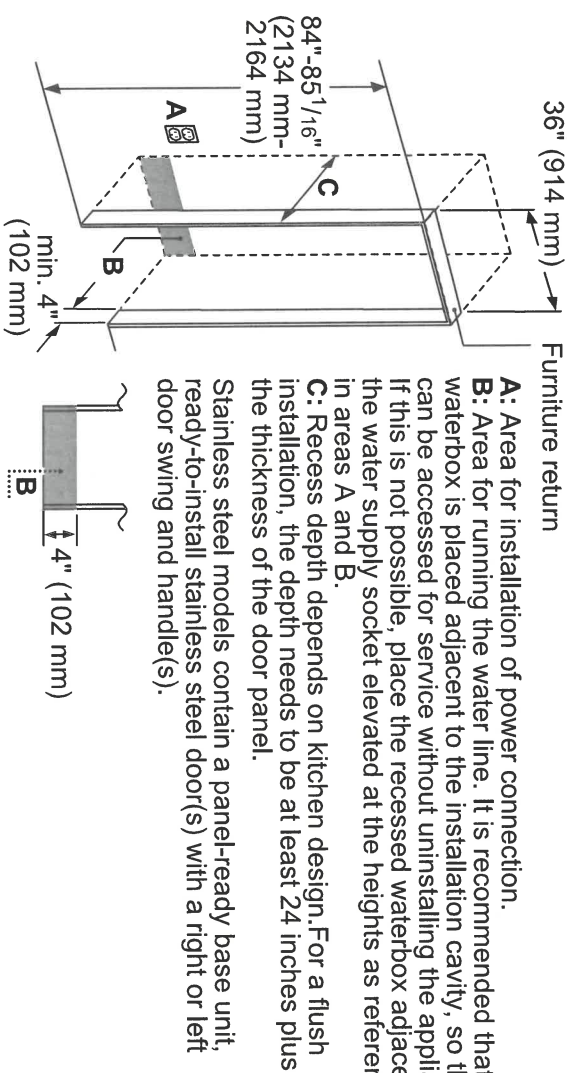


TOP VIEW CLEARANCE

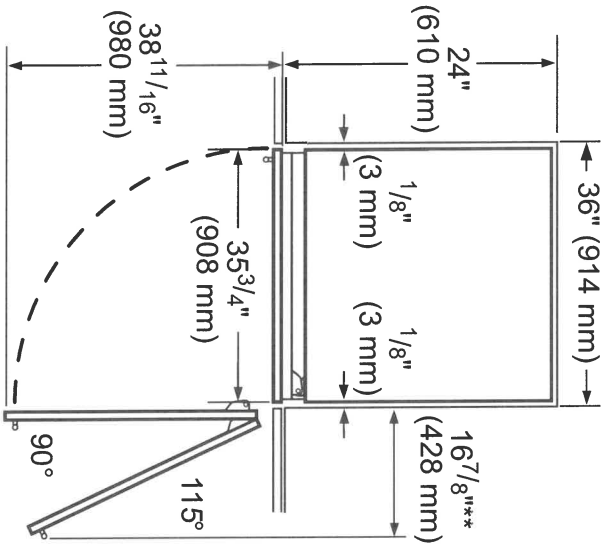

** Door handle must be added to this dimension

* Depends on the thickness of the furniture door. 3/4" (19 mm) is relevant for the stainless steel door. (special Accessory).



Dec 17/21

2 of 24


T361R905SP

36-INCH BUILT-IN FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY



PRODUCT AND PANEL DIMENSIONS

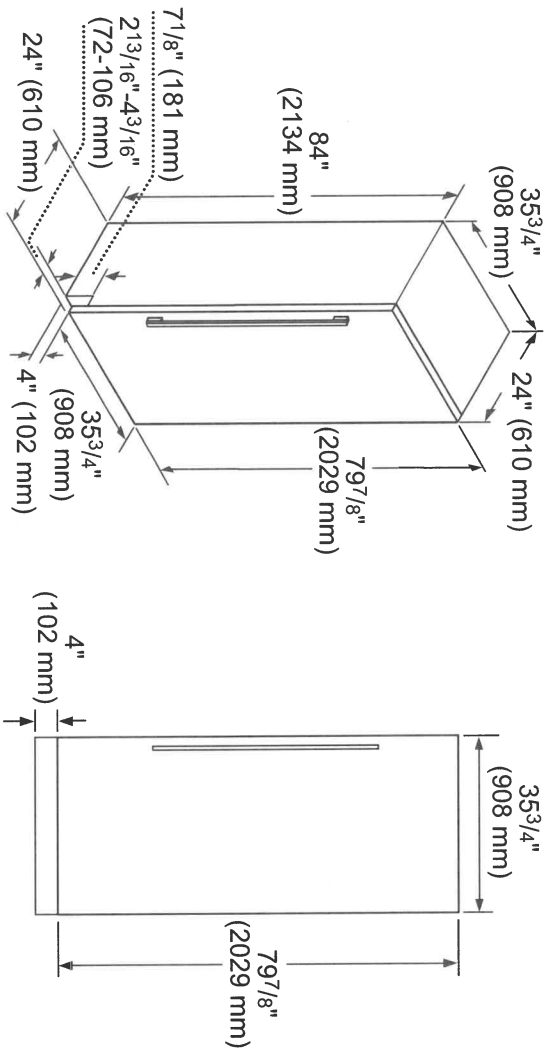

ACCESSORIES (OPTIONAL)

FLAT STAINLESS STEEL DOOR PANELS	STORAGE
36-Inch Flat Stainless Steel Door Panel Without Dispenser	 SPRODBIN10 Small Produce Bin
 TFL361R900 For use with Handle TFL361R905 Handleless	 LPRODBIN10 Large Produce Bin
HANDLES Choose between two options:	 36PRODRAIL 36-Inch Produce Railing
PR36HNDL20 36-Inch Professional Series Handle	 36HFGALBIN 36-Inch Half Gallon Bin
or	
MS36HNDL20 36-Inch Masterpiece® Series Handle	 FRAMEKIT10 Freedom® Frame Kit For any custom column installation in 24-inch deep cutouts. With two metal side trims whose placement between the interior cutout wall and the appliance helps overcome the challenge of unfinished cabinet returns.
	 HEATRKIT20 – 13W @ 120V Freedom® Heater Kit When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this sealing kit is included. For all other (non- traditional, i.e. two wine columns, two bottom freezers, etc.) side- by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of purchase. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.


1 800 735 4328 | USA: THERMADOR.COM | CANADA: THERMADOR.CA | ©2021 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Dec 17/21

8824

3450

T18ID905RP
18-INCH BUILT-IN FREEZER COLUMN WITH
ICE & WATER DISPENSER
FREEDOM® COLLECTION, PANEL-READY, RIGHT-HAND DOOR SWING

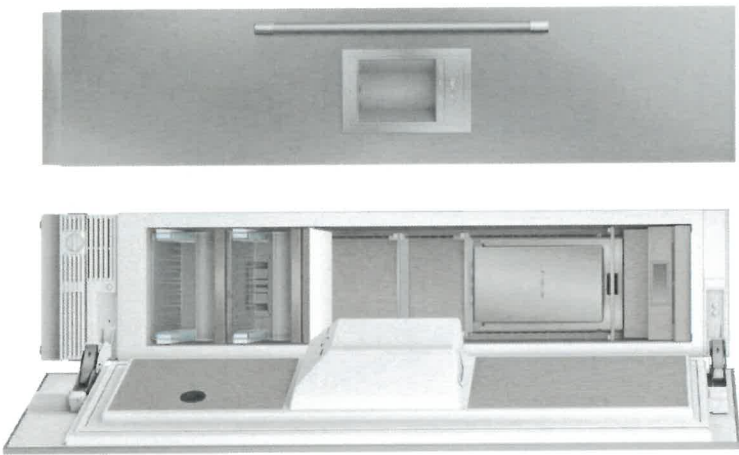

Also Available In:
T18ID905LP – Left-Hand Door Swing

FEATURES & BENEFITS

- Full Stainless Steel Inner Liner
- Freedom® Hinge enables true flush design
- Auto Door Opening provides the opening of the door with just a slight push or pull
- Energy Efficient Diamond Ice made with twist tray technology
- Smooth Filtered Lighting for clear and easy viewing of all product
- SoftClose® Drawers for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

Freezer	-11°F (-24°C) to 7°F (-14°C)
SuperFreeze®	-22°F (-30°C) for approximately 52 hours
Energy Saving (Economy) Mode	3°F (-16°C)

Panel Required

Dec 17/21

GENERAL PROPERTIES

Home Connect™ (Wi-Fi Enabled)	Yes
Panel Ready	Yes
Reversible Door Swing	No
SoftClose® Door	Yes
SoftClose® Drawers	Yes
Lighting	LED Sidewall and Theater Lighting
Freezer Shelves	4
Adjustable Shelves	2
Shelf Material	Glass w/Aluminum Profile
Full Extension Drawers @ 115° Door Opening Angle	Yes
General Use Drawer	2
Door Bins	0
External LED Proximity Sensor	Yes
Oversized Dispenser Opening	Yes
Chilled Water, Crushed and Cubed Ice	Yes
Rapid Water Replenishment System	Yes
Ice Maker with Diamond Ice System	Yes
Door Open Alarm	Yes
Open Door Assist	Yes
Special Modes	Sabbath, Economy, Vacation

CAPACITY

Total Capacity (cu. ft.)	7.8 cu. ft.
--------------------------	-------------

PERFORMANCE

Dedicated Evaporator & Compressor System	Yes
SuperFreeze®	Yes
Defrost Process	Frost-Free

TECHNICAL DETAILS

Watts (W)	350 W
Current (A)	15 A
Volts (V)	110-120 V
Frequency (Hz)	60 Hz
Power Cord Length (in.)	118

Plug Type	120V-3 Prong
-----------	--------------

DIMENSIONS & WEIGHT

Appliance Dimensions (H x W x D) (in.)	83 3/4" x 17 3/4" x 24"
Required Cutout Size (H x W x D) (in.)	84" x 18" x 25"
Net / Gross Weight (lbs)	289 / 319 lbs

EFFICIENCY

ENERGY STAR® Certified	Yes
Annual Energy Consumption	428 kWh

*Height adjustable +/- 1/2" (+/- 13 mm)

345W

4 of 24




T18ID905RP
18-INCH BUILT-IN FREEZER COLUMN WITH
ICE & WATER DISPENSER
FREEDOM® COLLECTION, PANEL-READY, RIGHT-HAND DOOR SWING

WARRANTY


Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
Limited Warranty for Sealed Refrigeration System*; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System*; Parts Only	7th to 12th Year
Limited Warranty for Stainless Steel Rust-Through	Lifetime

*Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

CUTOUT DIMENSIONS

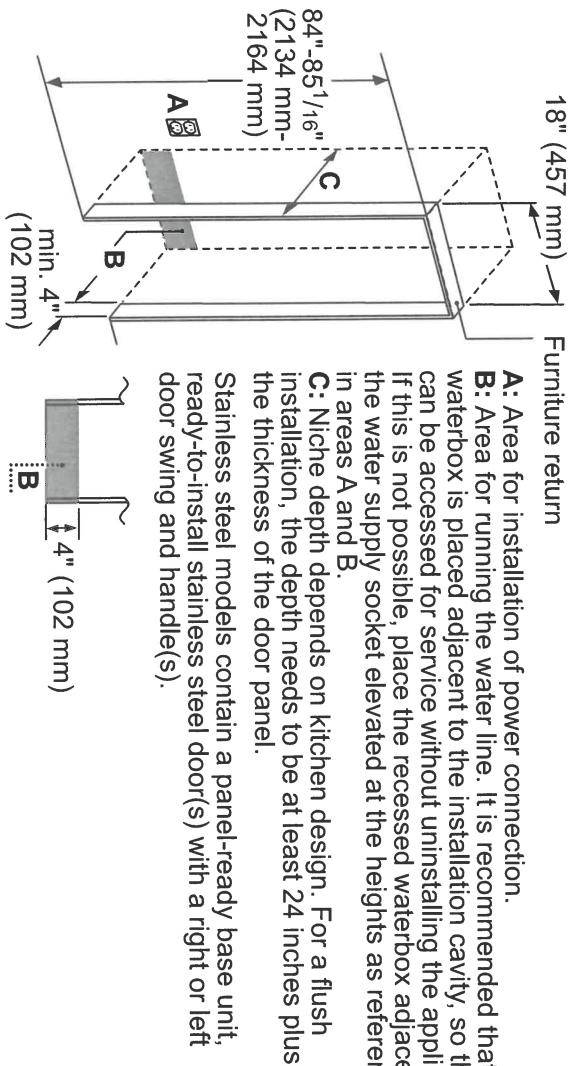


TOP VIEW CLEARANCE

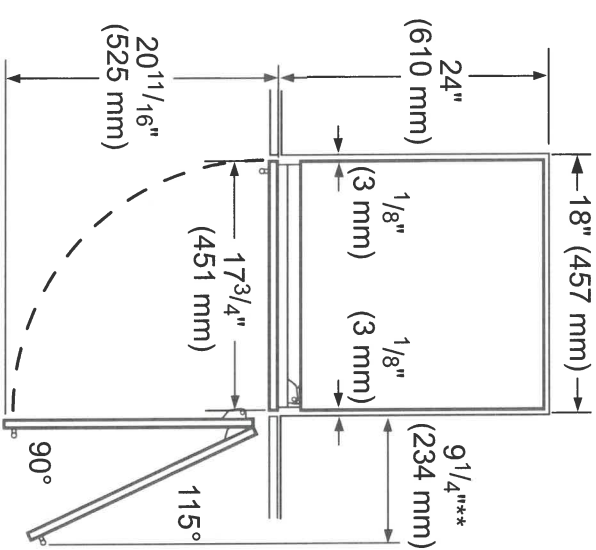

** Door handle must be added to this dimension

* Depends on the thickness of the furniture door. 3/4" (19 mm) is relevant for the stainless steel door. (special Accessory).

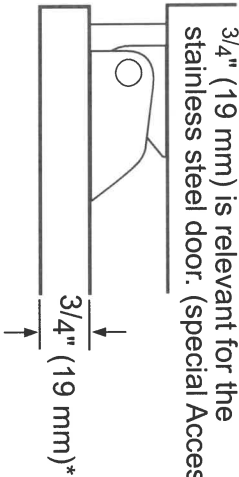

Dec 17/21

5 of 24


T18ID905RP

18-INCH BUILT-IN FREEZER COLUMN WITH ICE & WATER DISPENSER



FREEDOM® COLLECTION, PANEL-READY, RIGHT-HAND DOOR SWING

PRODUCT AND PANEL DIMENSIONS

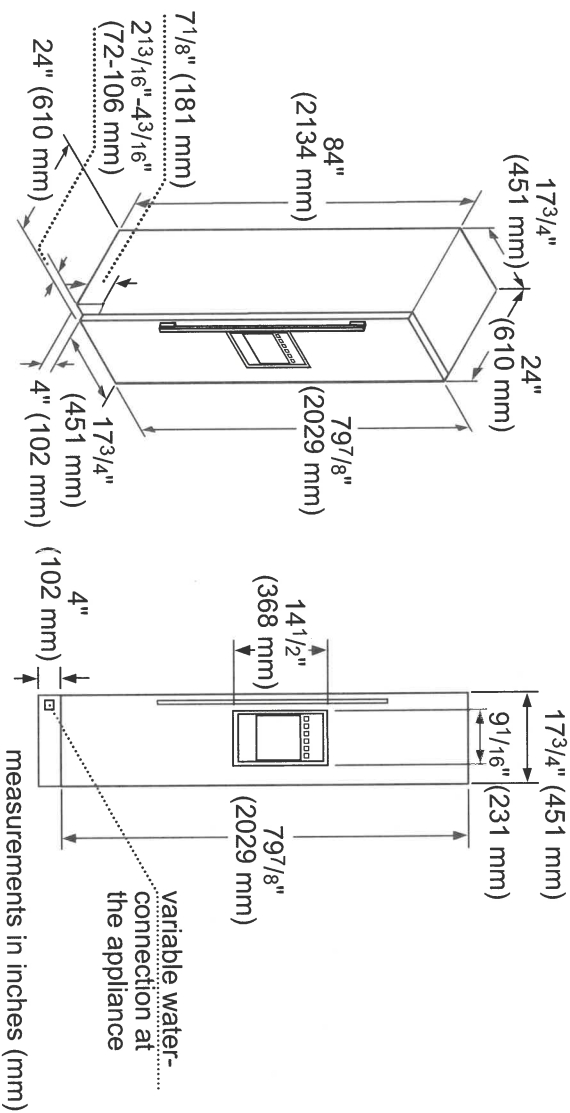

ACCESSORIES (OPTIONAL)

FLAT STAINLESS STEEL DOOR PANELS

18-Inch Flat Stainless Steel Door Panel With Dispenser



TFL18ID800
For use with Handle
TFL18ID905
Handleless

HANDLES

Choose between two options:




PR36HNDL20
36-Inch Professional Series Handle

or



MS36HNDL20
36-Inch Masterpiece® Series Handle



HEATRKIT20 - 13W @ 120V
Freedom® Heater Kit

When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this sealing kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers, etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

STORAGE



ICEBUCKETL
Large Ice Bucket

FRAMEKIT10

Freedom® Frame Kit

For any custom column installation in 24-inch deep cutouts. With two metal side trims whose placement between the interior cutout wall and the appliance helps overcome the challenge of unfinished cabinet returns.

FILTERS



REPLFLTR55
Freedom® Water Filter
Replacement water filter for use in all freezer and bottom freezer models

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of purchase. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.


1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2021 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Dec 17/21

68624

3490

PRD366WHC
36-INCH DUAL-FUEL PRO HARMONY® RANGE
PROFESSIONAL SERIES, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE

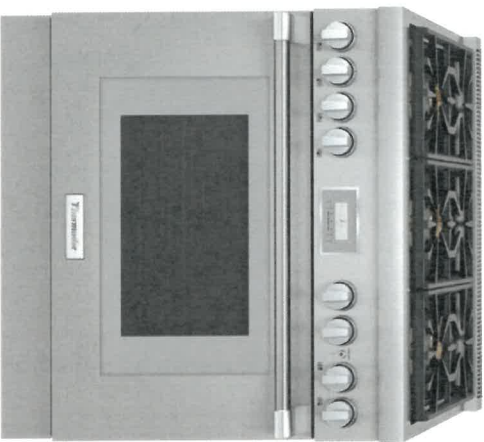

FEATURES & BENEFITS

- ★ - The Star® Burner delivers superior flame spread for more even heating
- ★ - Extralow® feature provides a wide range of temperature control, perfect for simmering delicate sauces
- ★ - 2 Extralow® burners for simmering, melting, or holding long durations
- ★ - Superfast 2.5-hour self-clean mode-fastest in the industry
 - Powerful third element convection for cooking on multiple levels


TECHNICAL DETAILS

Circuit Breaker	40 A
Volts	240 / 208 V, 60Hz 4 Wire
Energy Source	Gas and Electric
Plug Type	208 / 240V 4-Prong
Power Cord Length	60" (1524 mm)
Gas Supply	3/4"
WARRANTY	
Limited Warranty, Entire Appliance, Parts and Labor	2 Year

SEE PAGE 2 FOR INCLUDED AND OPTIONAL ACCESSORIES

★ THERMADOR® EXCLUSIVE

RANGETOP

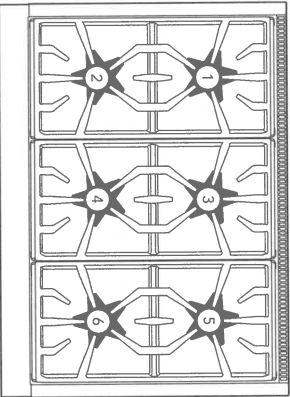

Total number of cooktop Burners	6
1 – Power of Back Left Burner BTU	15,000 and XLO
2 – Power of Front Left Burner BTU	18,000 and XLO
3 – Power of Back Center Burner BTU	15,000
4 – Power of Front Center Burner BTU	18,000
5 – Power of Back Right Burner BTU	15,000
6 – Power of Front Right Burner BTU	18,000

OVEN

Oven Capacity	4.9 cu. ft.
---------------	-------------

Cooking Modes

Bake, Convection Bake, True Convection, Convection Roast, Roast, Convection Broil, Broil

Sabbath	Yes
Self Clean	Yes
Telescopic Rack(s)	3
Interior Lights	2
Bake Power	2,000 W
Broil Power	4,000 W
Convection Power	2,750 W
Home Connect™ (Wi-Fi Enabled)	Yes
Cavity Interior Dimensions (HxWxD)	16 3/8" x 28" 18 1/2"
Cavity Usable Dimensions (HxWxD)	12" x 25 3/8" x 16 3/4"

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (HxWxD)	35 3/4" – 36 3/4" x 35 15/16" x 24 5/8"
Required Cutout Size (HxWxD)	35 3/4" – 36 3/4" x 36" x 24"
Net Weight	410 lbs.

Deal 17/21

7 of 24


345W

PRD366WHC
36-INCH DUAL-FUEL PRO HARMONY® RANGE
PROFESSIONAL SERIES, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE



36-INCH RANGE DIMENSIONS AND CLEARANCE REQUIREMENTS WITH "LOW BACK"

NOTE: A 36-inch minimum clearance is required between the top of the cooking surface and the bottom of an unprotected cabinet. A 30-inch clearance can be used when the bottom of the wood or metal cabinet is protected by not less than 1/4 inch of a flame retardant material covered with not less than No. 28 MSG sheet steel, 0.015 inch (0.4 mm) thick stainless steel, 0.024 inch (0.6 mm) aluminum, or 0.020 inch (0.5 mm) thick copper.

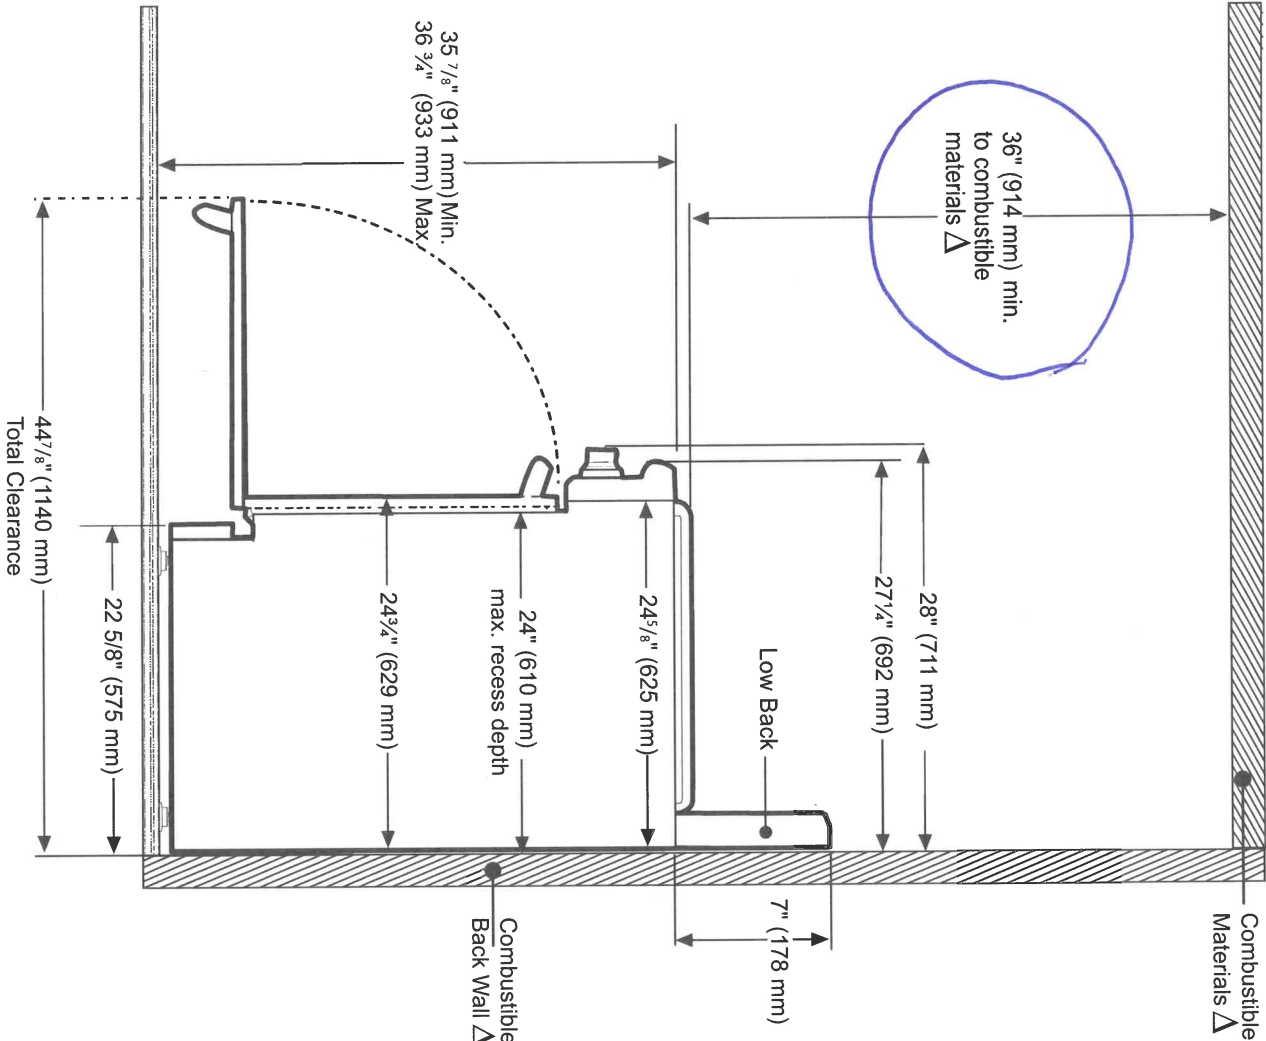

Δ As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition), Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 6" (152 mm) must be approved by the local codes and/or by the local authority having jurisdiction.

Dec 17/21


34576

98624

PRD366WHC
36-INCH DUAL-FUEL PRO HARMONY® RANGE
PROFESSIONAL SERIES, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE



36-INCH RANGE DIMENSIONS AND CLEARANCE REQUIREMENTS WITH "FLUSH ISLAND TRIM"

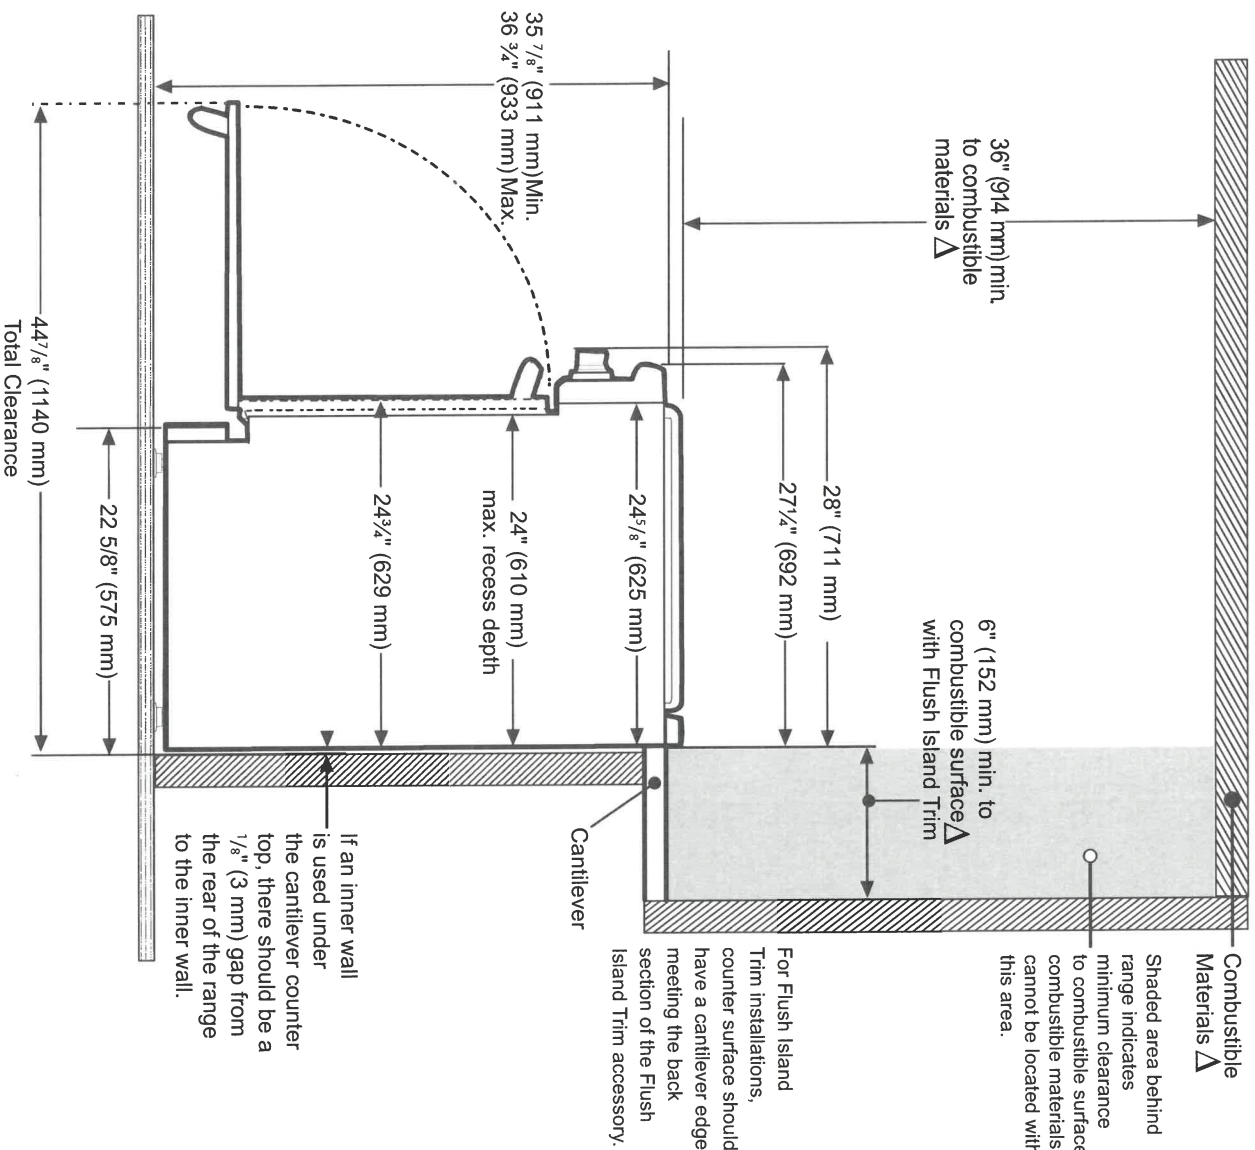

Δ As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition), Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 6" (152 mm) must be approved by the local codes and/or by the local authority having jurisdiction.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of purchase. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2021 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Deer 17/24

3450 10 of 24

PH36HS

24-INCH DEPTH WALL HOOD (36-INCH WIDTH)

PROFESSIONAL SERIES



FEATURES & BENEFITS

- Three fan speeds
- Delayed shut-off tackles lingering odors for up to 10 minutes
- Built-in 'Clean Filter' reminder light illuminates after 40 hours of operation
- Filter systems are highly efficient at capturing grease
- Dishwasher-safe grease collection trays are easily removed
- 24" depth hood is 18" tall and a perfect companion with Pro Harmony Ranges and Rangetops

ACCESSORIES (OPTIONAL)

25 ft. Blower Connector Cable - EXTNCB25

For use with the following Inline and Remote Blowers:
VTR630D, VTR1030D, VTR1330E, VTI610D, VTI1010D

Roofplates

RFPLT600 - For use with 600 CFM Remote Blower VTR630D
RFPLT1000 - For use with 1000 CFM Remote Blower VTR1030D
and 1300 CFM Blower VTR1330E

36" W Keep-Hot Shelf	KHS36QS
36" W, 6" H Stainless Steel Duct Cover	DC36US
36" W, 12" H Stainless Steel Duct Cover	DCT36US
36" W Stainless Steel Backsplash	PA36JBS
Roof Jack	RJ310
Wall Cap	WC10

GENERAL PROPERTIES

Operating Mode	Ducted
Maximum CFM	N/A
Number of Speed Settings	3-Stage
Motor Location	Blower (Sold Separately)
Number Of Lights	2
Bulb Type	20 W - G9 Base
Total Power Of The Lamps (W)	40 W
Damper Included	Yes
Grease Filter Material	Washable Stainless Steel
Grease Filter Type	Commercial-Style Baffle
TECHNICAL DETAILS	
Watts (W)	N/A
Current (A)	15; 20 A
Volts (V)	120 V
Frequency (Hz)	60 HZ
Plug Type	120V-3 Prong

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (Width Of Canopy Included) (HXWXD) (in)	18" x 35 15/16" x 24"
Required Distance Above Cooktop / Range Cooking Surface	30" / 30"

Diameter of Air Duct (in) Top	10"
-------------------------------	-----

Diameter of Air Duct (in) Back	10"
--------------------------------	-----

Net Weight (lbs)	75 lbs
------------------	--------

ACCESSORIES (REQUIRED)

Blower (Sold Separately)

BLOWER OPTIONS

Remote Blower (Mounted to Roof or External Wall)	VTR630D - 600 CFM
	VTR1030D - 1000 CFM
	VTR1330E - 1300 CFM

Inline Blower (Mounted Between Kitchen and External Wall)	VTI610D - 600 CFM
	VTI1010D - 1000 CFM
	VTN630N - 600 CFM
Integrated Blower (Mounted in Hood)	VTN1030N - 1000 CFM

WARRANTY

Limited Warranty Parts And Labor	2 Year
----------------------------------	--------

345W


Dec 17/21

11 & 24

PH36HS
24-INCH DEPTH WALL HOOD (36-INCH WIDTH)
PROFESSIONAL SERIES



HOOD DIMENSIONS

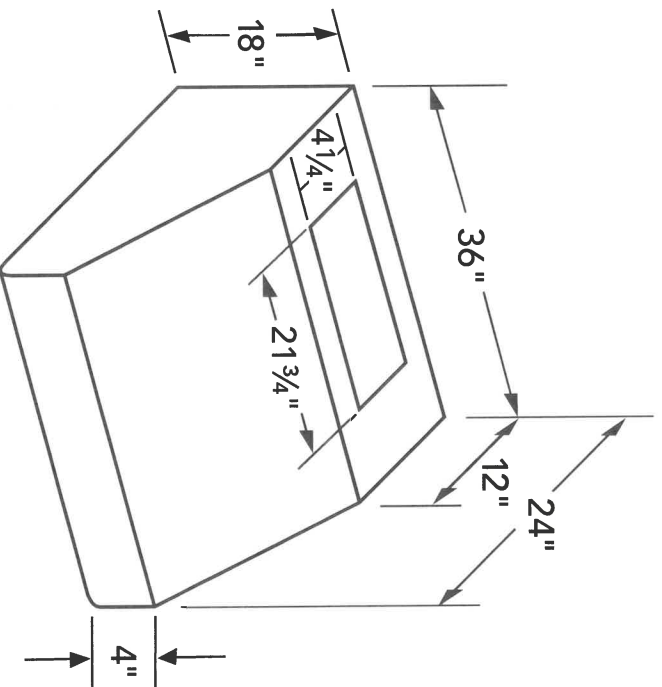

345W

12-26-24

Dec 17/21


PH36HS
24-INCH DEPTH WALL HOOD (36-INCH WIDTH)
 PROFESSIONAL SERIES




OPTIONAL ACCESSORIES

KEEP-HOT SHELF
KHS36QS 36" WIDE

- Stainless steel finish
- Convenient shelf allows dishes to keep hot at serving temperature.
- Includes stainless steel backguard and two shelves.

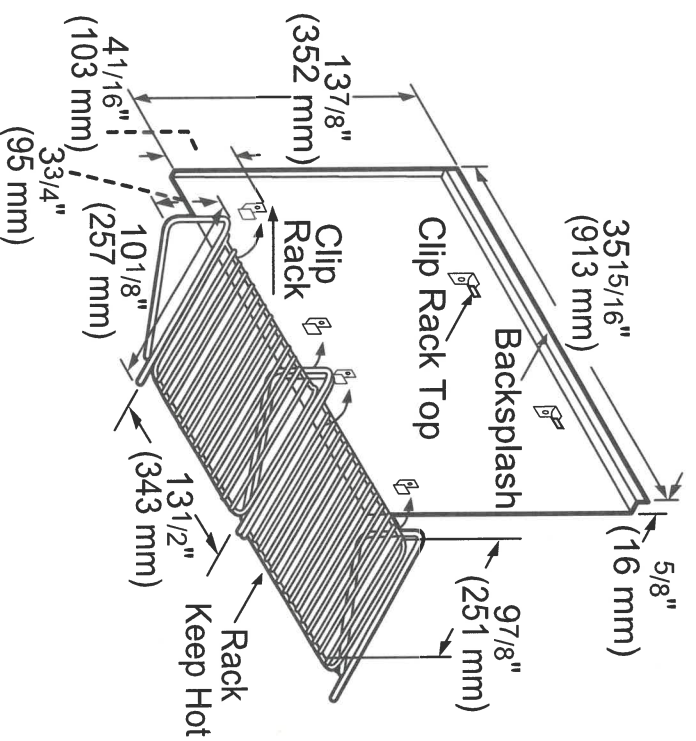


measurements in inches and mm

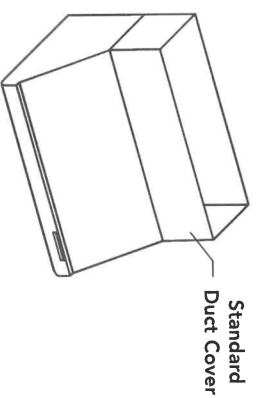

36" WIDE DUCT COVER
DC36US 6" HIGH
DCT36US 12" HIGH

Stainless steel duct cover for wall hood applications

STAINLESS STEEL BACKSPLASH
PA36JBS 36" WIDE

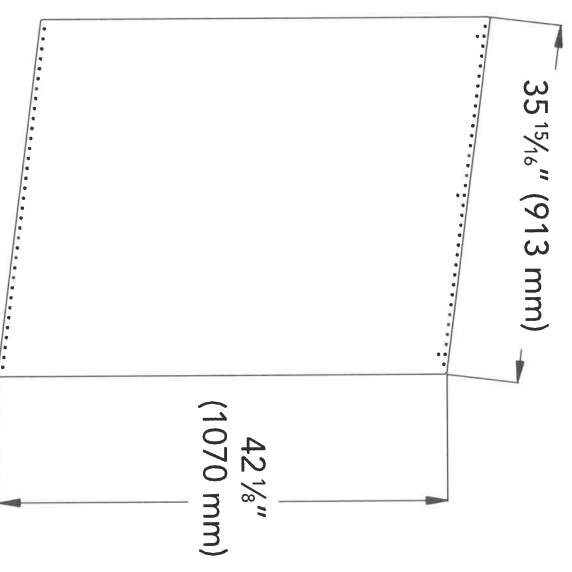

3450

Dec 17/21


13 of 24

PH36HS
24-INCH DEPTH WALL HOOD (36-INCH WIDTH)
PROFESSIONAL SERIES




REMOTE BLOWERS (MOUNTED TO ROOF OR EXTERNAL WALL)

VTR630D—600 CFM

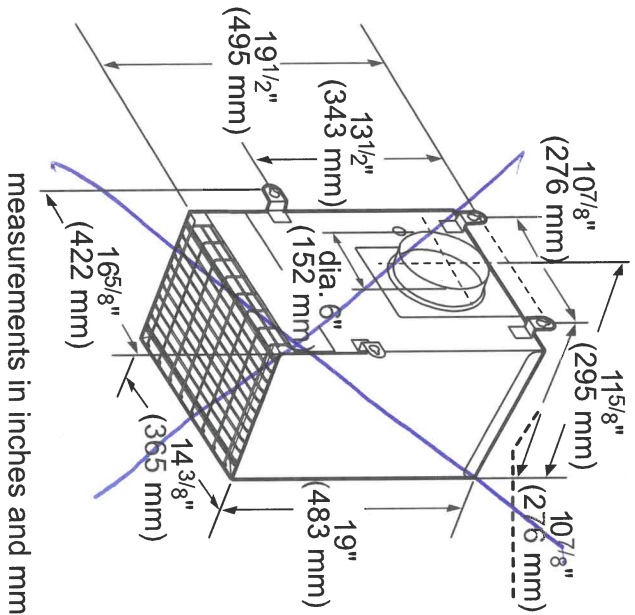


measurements in inches and mm

VTR1030D—1000 CFM

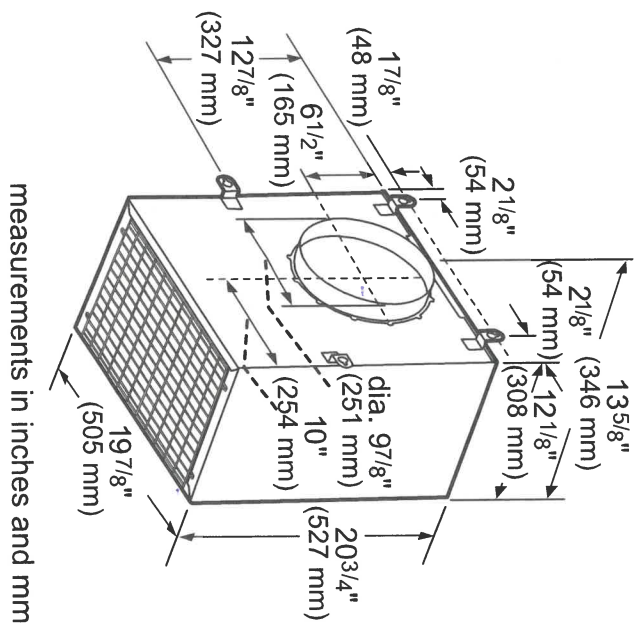

measurements in inches and mm

VTR1330E—1300 CFM

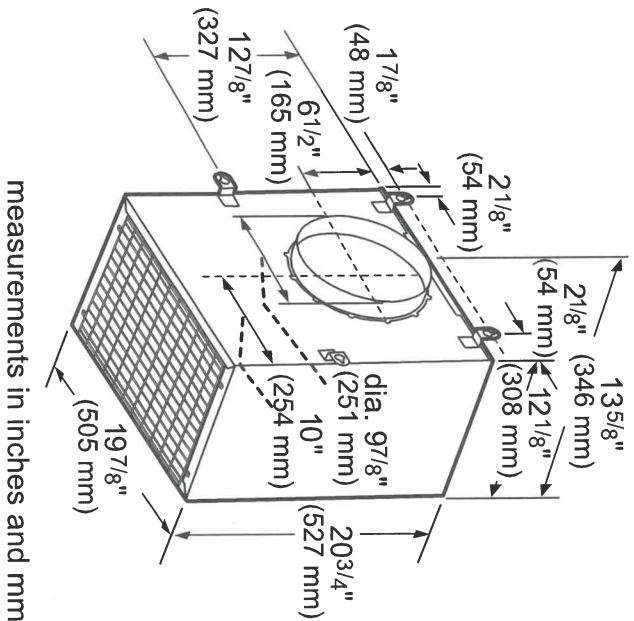

measurements in inches and mm

345W

Dec 17/21


14 of 24

PH36HS
24-INCH DEPTH WALL HOOD (36-INCH WIDTH)
PROFESSIONAL SERIES




REMOTE BLOWER ACCESSORIES

ROOFPLATE RFPPLT600

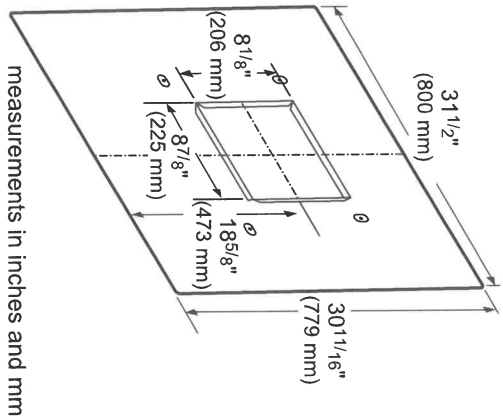

ROOFPLATE RFPPLT1000

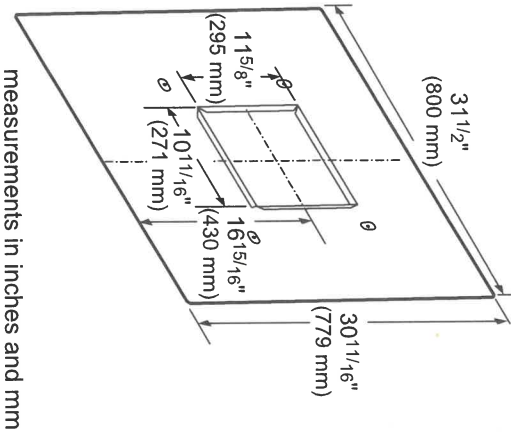


EXTNCB25


25 ft. Blower Connector Cable for use with the following Inline and Remote blowers: VTR630D, VTR1030D, VTR1330E, VT1610D, VT11010D

ROOF JACK & TRANSITION

ROOF JACK-RJ310




TRANSITION

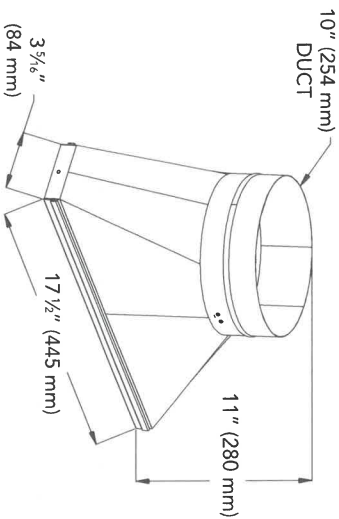

WALL CAPS

10-INCH WALL CAP-WC10

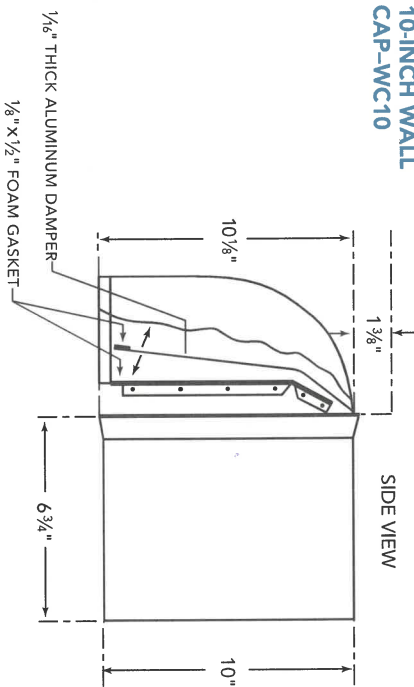

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2015 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.


05 / 15

Dec 17/21

16 of 24


345W

MC30WP
30-INCH SPEED OVEN
PROFESSIONAL SERIES

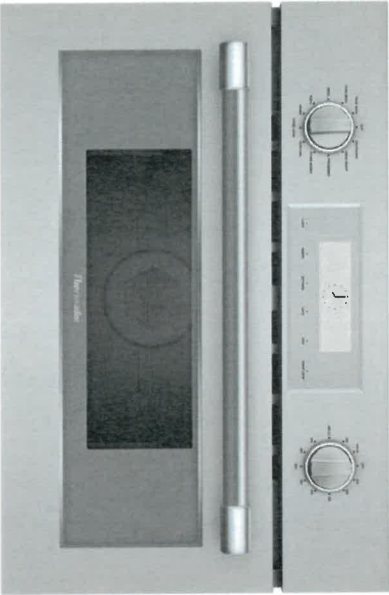

FEATURES & BENEFITS

- A microwave and a convection oven for a variety of cooking options including convection bake and broil.
- 36 Cook Smart™ automatic cooking programs offer faster cooking times for your convenience
- 10 levels of microwavable power with a kitchen timer and panel lock setting
- Specially crafted gray glass on stainless steel for a luxurious look and finish
- Designed for flexibility – standard or flush installation into kitchen cabinets

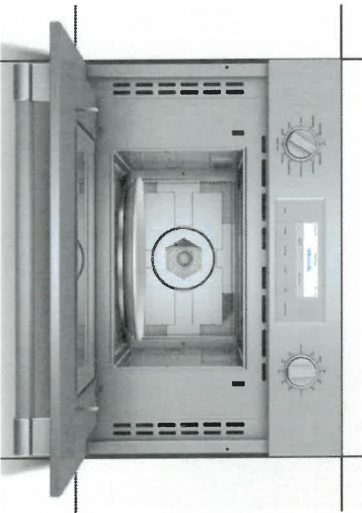

GENERAL PROPERTIES	
Cavity Color	Stainless Steel
Microwave Power (W)	1000 W

Modes

36 Cook Smart™ Auto Programs (Including European Convection, HI & Lo Broil, Keep Warm, Frozen Foods) + Microwave

OVEN PERFORMANCE	
Bake Element Wattages	600 W
Broil Element Wattages	1,750 W
Convection Element Wattages	1,700 W

CAPACITY	
Cavity Capacity (cu. ft.)	1.6 cu. ft.

TECHNICAL DETAILS	
Watts (W)	3,840 W
Circuit Breaker (A)	16 A
Volts (V)	208 or 240 V
Frequency (Hz)	60 Hz

Plug Type	4 wire fixed connection
Power Cord Length (in.)	48"

DIMENSIONS & WEIGHT	
Overall Appliance Dimensions (HxWxD) (in.)	19 5/8" x 29 3/4" x 22 3/8"
Required Cutout Size (HxWxD) (in.) – Standard Install	19 1/4" x 28 1/2" x 22"
Required Cutout Size (HxWxD) (in.) – Flush Install	20 1/8" x 30" x 23 1/2"
Oven Overall Interior Dimensions (HxWxD) (in.)	9 7/8" x 16 1/2" x 16 1/2"
Turntable Diameter (in.)	12 3/4"
Turntable Diameter (in.) – Ceramic Cookware Max.	12 1/2"
Rack – Rectangular Cookware Max.	15" x 12"
Net Weight (lbs)	96 lbs.

ACCESSORIES (INCLUDED)	
Metal turntable, cooking rack, ceramic cooking tray	

WARRANTY	
Limited Warranty, Entire Appliance, Parts and Labor	2 Year



Dec 17/21

345W 17 of 24

MC30WP
30-INCH SPEED OVEN
PROFESSIONAL SERIES



INSTALLATION DETAILS

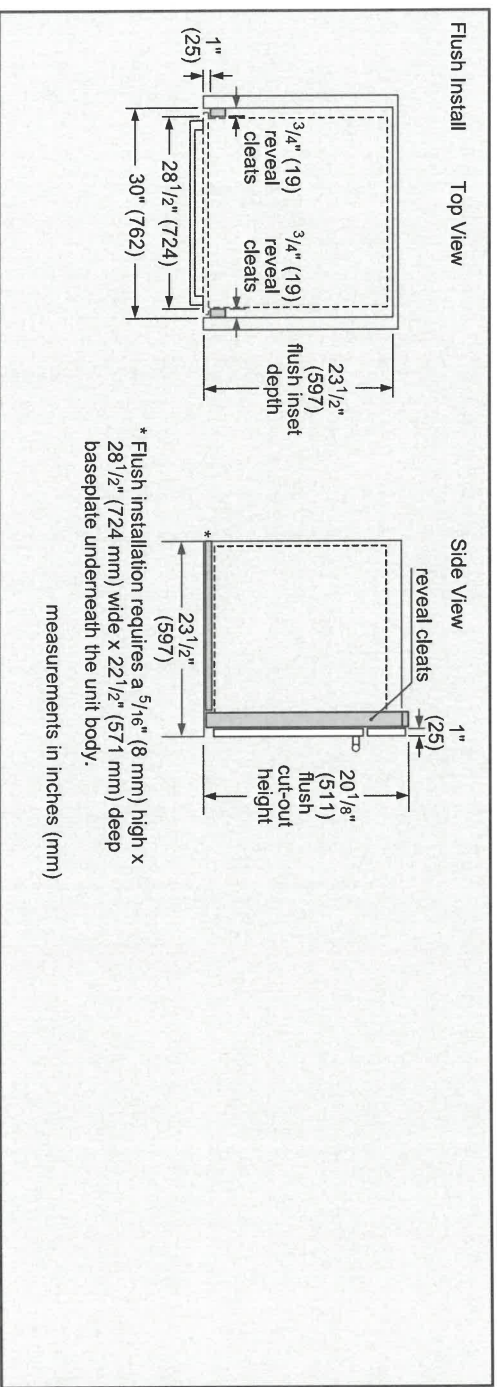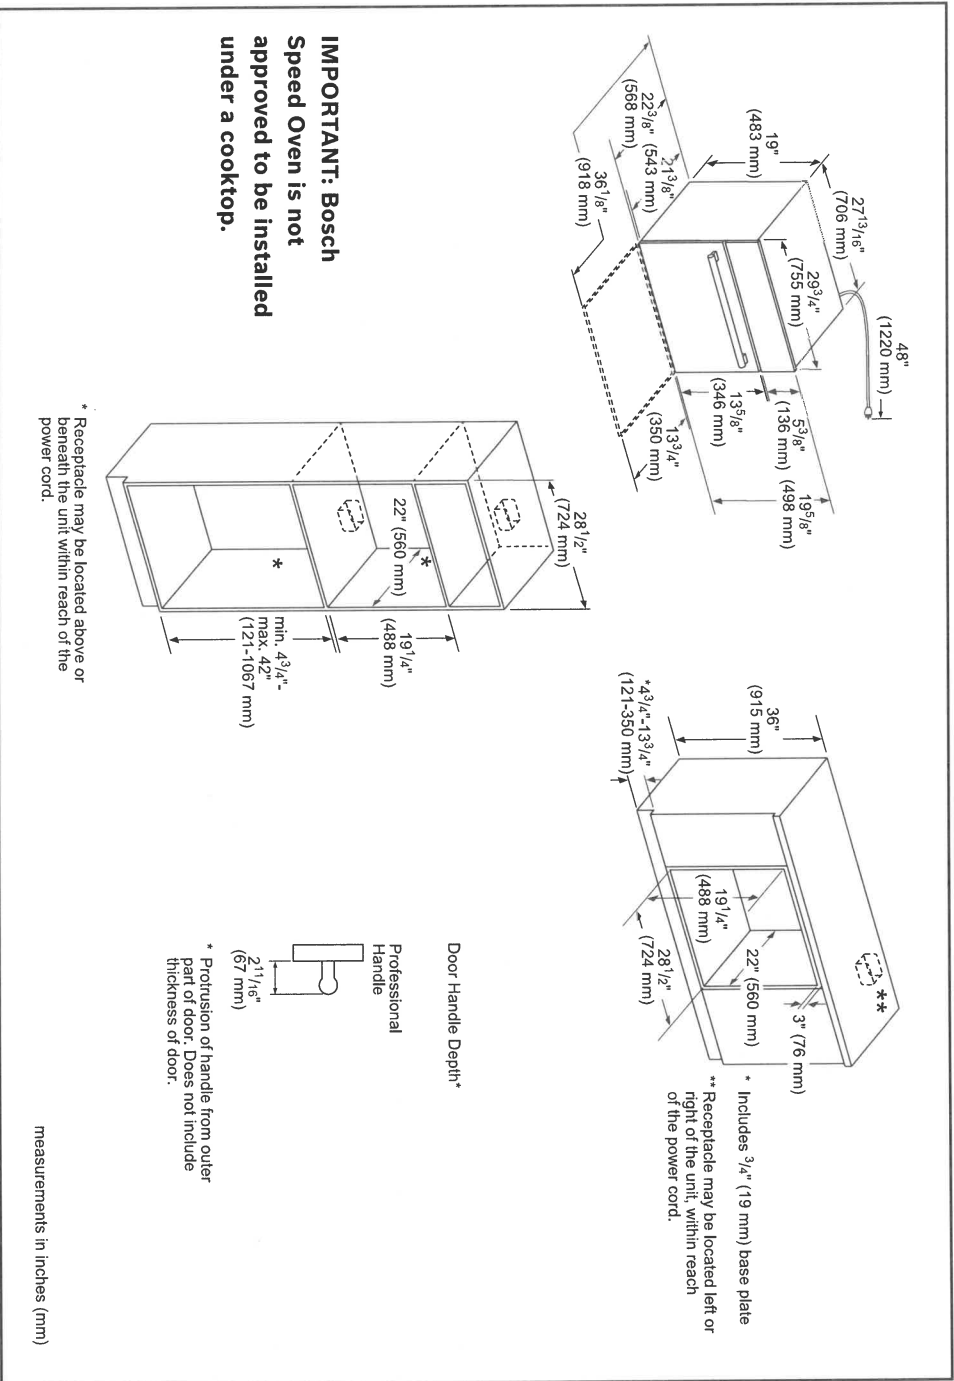

345u

Dec 17/21


18 of 24

MC30WP
30-INCH SPEED OVEN
PROFESSIONAL SERIES




INSTALLATION DETAILS

Standard Side-by-Side Installation

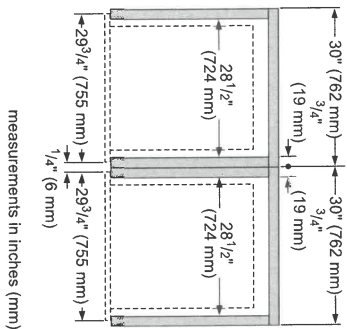

Flush Side-by-Side Installation

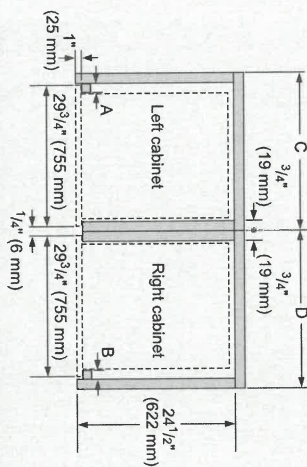


Combination Type	A	B	C	D
Flush/Drop down door	Left reveal cleat 3/4" (19 mm)	Right reveal cleat 3/4" (19 mm)	Cut-out width 29 1/4" (743 mm)	Cut-out width 29 1/4" (743 mm)
Flush Left swing door	1 1/2" (38 mm)	N/A*	30" (762 mm)	N/A*
Flush Right swing door	N/A*	1 1/2" (38 mm)	N/A*	30" (762 mm)

*Installation not recommended

measurements in inches (mm)


Standard Installation Over Single Oven

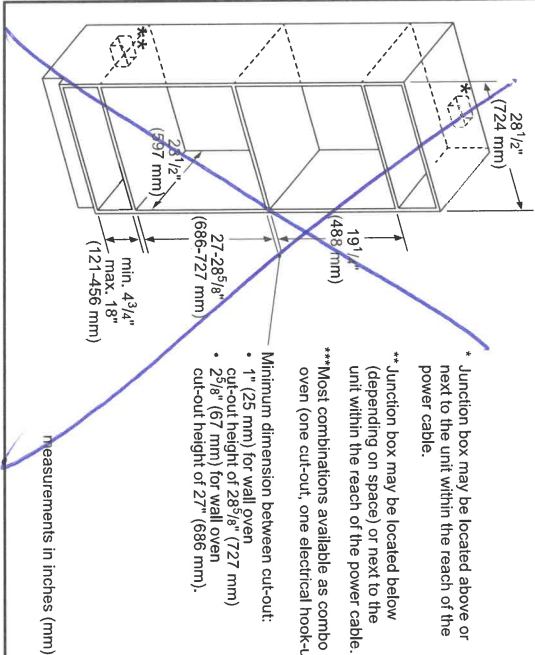

- * Junction box may be located above or next to the unit within the reach of the power cable.
- ** Junction box may be located below (depending on space) or next to the unit within the reach of the power cable.
- ***Most combinations available as combo oven (one cut-out, one electrical hook-up).
- Minimum dimension between cut-out:
 - 1" (25 mm) for wall oven cut-out height of 28 5/8" (727 mm)
 - 2 5/8" (67 mm) for wall oven cut-out height of 27" (686 mm).

measurements in inches (mm)

Flush Installation Over Single Oven

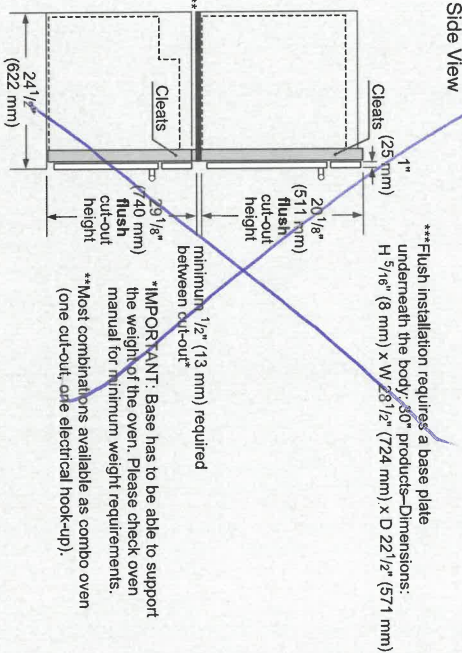

- ***Flush installation requires a base plate underneath the body, 30" products—Dimensions: H 5 7/8" (8 mm) x W 28 1/2" (724 mm) x D 22 1/2" (571 mm)
- **IMPORANT: Base has to be able to support the weight of the oven. Please check oven manual for minimum weight requirements.
- ***Most combinations available as combo oven (one cut-out, one electrical hook-up).

measurements in inches (mm)

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.


Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2018 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Dec: 17/21 19 of 24



Avanti 154 Bottle DESIGNER Series Dual-Zone Wine Cooler, Stainless Steel with Black Cabinet

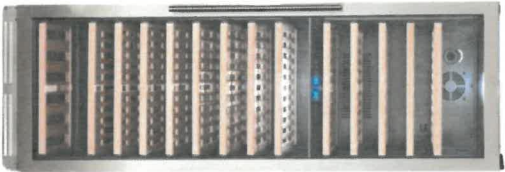

Keep wine chilled in this large, 154-bottle capacity, dual-zone wine from Avanti's . This wine fridge is ideal for the office, man cave, she -shed, bar, basement, or anywhere you want to beautifully store your wine collection. Easily view your choices through the glass door and remove the bottle seamlessly with the pull-out wooden shelves. This spacious wine cooler features LED light control, a reversible double-pane glass door, and a built-in fan with a charcoal filter to maintain an even temperature. Select the right settings at the touch of a button and monitor the temperature (C°/F°) with the temperature monitor display.

Holds up to 154 bottle	SKU	WCF154S3SD
Dual zone temperature range: lower 55 ° - 65 ° / upper 40 ° - 55 °	UPC	079841181544
Long life/cool LED interior display lighting with ON/OFF switch for each zone	Product Dimensions (WxDxH, in)	23.5 x 28.5 x 71.25
One touch ON/OFF interior LED light control	Product Weight (lbs)	232
Built-in fan with charcoal filter	Shipping Dimensions (WxDxH, in)	25.75 x 30.25 x 75
Reversible, double-pane tempered glass door	Shipping Weight (lbs)	247
Full extension wooden shelves on roller		
ADA compliant		
1-year manufacturer limited warranty		

115/120 VOLT

345W

Dec 17/21

20 & 24

INSTALLATION INSTRUCTIONS

➤ **BEFORE USING YOUR WINE CHILLER**

- Remove the exterior and interior packing.
- Check to be sure you have all of the following parts:

1	Instruction Manual
	Large Shelves Model: WCF16SS3SS – Total 14 Model: WCF154S3SD – Total 13 Model: WCF143S3ST – Total 12
1	Short Shelf
1 Set	Hinges for Door Swing Reversal
1	Stainless Steel Handle

- Before connecting this appliance to the power source, let it stand upright for approximately 2 hours. This will reduce the possibility of a malfunction in the cooling system from handling during transportation.
- Clean the interior surface with lukewarm water using a soft cloth.

➤ **INSTALLATION OF YOUR WINE CHILLER**

- This appliance is designed to be for free standing installation or built-in (fully recessed).
- Place your Wine Chiller on a floor that is strong enough to support it when it is fully loaded. To level your Wine Chiller, adjust the front leveling legs at the bottom of the Wine Chiller.
- Locate the Wine Chiller away from direct sunlight and sources of heat (stove, heater, radiator, etc.). Direct sunlight may affect the acrylic coating and heat sources may increase electrical consumption. Extreme cold ambient temperatures may also cause the unit not to perform properly.
- Avoid locating the unit in moist areas.
- Plug the Wine Chiller into an exclusive, properly installed-grounded wall outlet. Do not under any circumstances cut or remove the third (ground) prong from the power cord. Any questions concerning power and/or grounding should be directed toward a certified electrician or an authorized Avanti Products service center.

➤ **BUILT – IN CABINET INSTRUCTIONS**

This unit is designed for both built-in or free standing installation. If you plan to use this unit in a built-in application, please follow the requirements shown below.


Dimensions		
	Unit	Minimum Cabinet Opening
Width	23 1/2"	24"
Depth (without handle)	26 3/4"	26"
Height	70 3/4"	71"

34520

Page 21A

Dec 17/21

DWHD650WFP
EMERALD® 6-PROGRAM DISHWASHER
PROFESSIONAL SERIES HANDLE

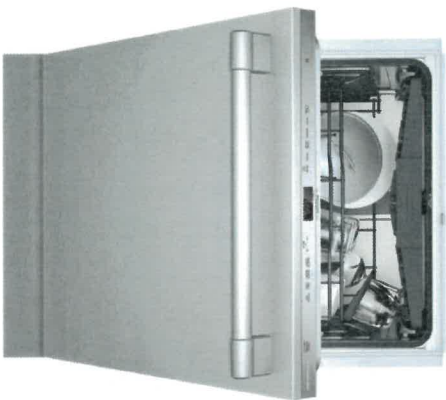

home
connect

Also Available In:
DWHD650WFM – Flat Stainless Steel Panel with
Masterpiece® Series Handle
DWHD650WPR – Custom Panel

FEATURES & BENEFITS

- Chef's Tool Drawer (3rd Rack) is designed to make loading and unloading tools and hard to place items extraordinarily easier
- Sens-A-Wash® measures water cleanliness and adjusts wash cycle
- Three stage advanced filtration recirculates water for sparkling results
- 3-Level adjustable upper rack is customizable for all of your needs, designed to be raised for extra large items placed on the bottom rack, or lowered to fit taller wine glasses on the upper rack
- Extra Dry Option ensures perfectly dry dishes and sanitizes 99.9% of bacteria
- Impressively Quiet® – 48 dBA for peaceful kitchen experience
- Thermador Connected Experience by Home Connect brings exclusive dish features that keep you connected. Always.

ACCESSORIES (OPTIONAL)

Dishwasher Supply and Drainage Hose Extension 76 3/4"	SGZ1010UC
Dishwasher Accessory Kit	SMZ5000
Fine Silverware Carafe	SMZ5002UC



Accessory Kit includes Extra-Tall-Item Sprinkler,
Vase / Bottle Holder, 3 Plastic Item Clips and
Small Item Basket

Fine
Silverware
Carafe

GENERAL PROPERTIES

Number Of Wash Cycles	6
Number Of Options	5
dBA	48
Third Rack	Chef's Tool Drawer®
Rack Adjustability	Rackmatic 3-Stage
Tub Material	Stainless Steel
Control Type	Touch Control
Concealed Heating Element	Yes
Leak Protection System	24/7 AquaStop®
Water Softener	No
Five-Level Wash	Yes
Childlock	No
Home Connect (Wi-Fi Enabled)	Yes

EFFICIENCY

Water Usage Per Cycle (g)	3.5 g
Energy Efficiency Class	Tier 1
ENERGY STAR® Qualified	Yes

Total Annual Energy Consumption (kWh)	269 kWh
Total Annual Water Consumption (g)	624 g

CAPACITY

Number Of Place Settings	16
--------------------------	----

TECHNICAL DETAILS

Watts (W)	1,440 W
Current (A)	12 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power Cord Length (in)	43 1/2"
Minimum Water Pressure (lb/sin)	14
Max. Temperature for Water Intake	140° F
Length Inlet Hose (in)	N/A
Length Outlet Hose (in)	79"

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (HxWxD) (in)	33 7/8" x 23 9/16" x 23 3/4"
Required Cutout Size (HxWxD) (in)	33 7/8" Min. x 23 5/8" Min. x 24"
Adjustable Feet	Yes
Net Weight (lbs)	93 lbs

Dec 17/21

345W

21624


DWHD650WFP
EMERALD® 6-PROGRAM DISHWASHER
PROFESSIONAL SERIES HANDLE



WARRANTY

Limited Warranty, Entire Appliance, Parts and Labor	2 Year
Limited Warranty for Microprocessor or Printed Circuit Board; Parts Only	3rd to 5th Year
Limited Warranty for Racks (Does Not Include Rack Components); Parts Only	3rd to 5th Year
Limited Warranty for Rust-through On Inner Tub Liner; Parts Only	Lifetime

DISHWASHER & CUTOUT DIMENSIONS

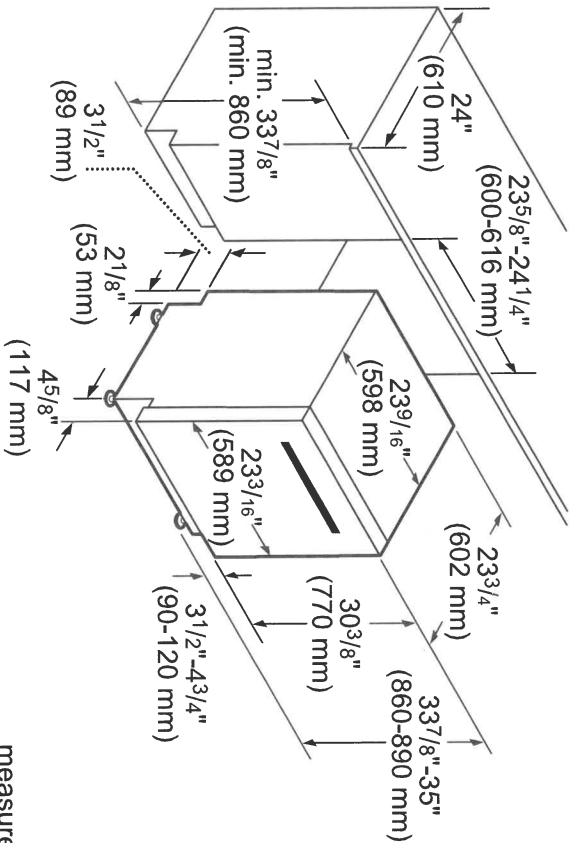

measurements in inches and mm

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2018 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Dec 17/21

34500

22 of 24




Whirlpool® 7.4 cu.ft Front Load Electric Dryer with Intuitive Touch Controls, Wrinkle Shield™ Plus Option with Steam

YWED6620HC

Available Finishes/Colours

☒ YWED6620HC
Chrome Shadow

☐ YWED6620HW
White

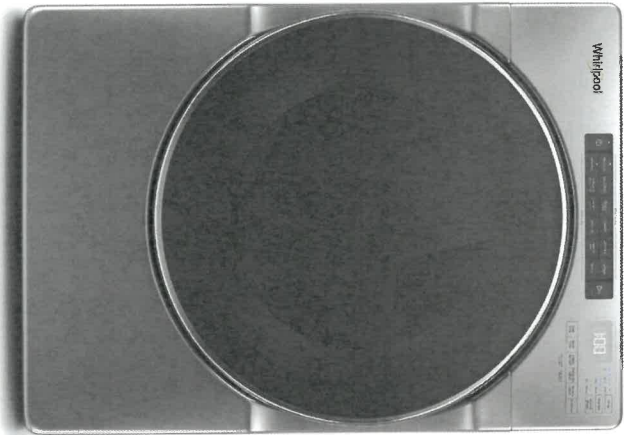

Dimensions

Height	38 3/4
Width	27
Depth	31

Cycle and Options

EcoBoost™/Energy Saver	Yes
Lint Filter Indicator	No
Maytag Commercial Technology Components	No
Temperature Selections	High, Low, Extra Low, Medium, Air Only

Configuration and Overview

Venting Direction
Left, Right, Bottom, Rear

Maximum Vent Length
64

Fuel Type
Electric

Capacity
7.40

Energy Star® Qualified
ENERGY STAR® Qualified

Style and Extras

Electronic Display Type	Cycle Indicator Lights
Drum Material	Powder Coat
Drying Rack	No
Interior Light	No
Pedestal Options	Yes
Stackable	Yes

Cycle and Options

Number of Dryer Cycles	37
Advanced Moisture Sensor	Yes

Cycle Time Remaining
Yes

Care is being flexible. That's why we help you do laundry in a way that fits your needs. Clothes are ready to wear thanks to the Steam Refresh cycle. It releases wrinkles and reduces odors without rewashing. Using water and a little heat, items that don't need to be rewashed are ready to wear in no time. Help keep wrinkles from setting into clean, dry fabrics. The Wrinkle Shield™ Plus option with Steam uses tumbling and steam for up to 150 minutes after the cycle ends or until you open the dryer door for improved wrinkle-fighting performance.

Top Features

Steam Refresh Cycle

Wrinkle Shield™ Plus Option with Steam

7.4 cu. ft. Capacity

Manuals & Literature:

Use and Care Installation Instructions

Warranty



Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

3490

Dec 17/21

23 of 24




Whirlpool® 5.2 cu.ft I.E.C. Closet Depth Front Load Washer with Load & Go™ XL Dispenser, 40 Loads

WFW6620HC

Available Finishes/Colours

☒ WFW6620HC
Chrome Shadow

☐ WFW6620HW
White

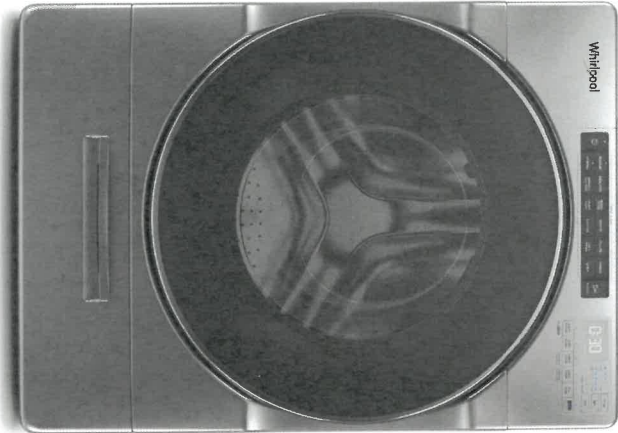

Dimensions

Width	27
Depth	31 9/16
Minimum Height	38 5/8

Controls

Stackable	Yes
Maytag Commercial Technology Components	No
LED Color	Blue
Display Type	Cycle Indicator Lights with Digital Time Remaining

Configuration and Overview

CEE Tier Rating	Tier II
Energy Star® Qualified	ENERGY STAR® Qualified
UL	UL

Cycle and Options

Number of Spin Speeds	5
Number of Soil Levels	3
Temperature Combinations	Hot, Extra Hot, Cold, Cool, Warm
Washer Option Selections	Extra Rinse, Steam Clean

Get the right care in fewer steps. Skip detergent refills for up to 40 loads with the Load & Go™ Plus dispenser¹. It holds detergent and automatically dispenses the right amount for every load so clothes get the care needed in less steps. Reduce wrinkles and odors without rewashing thanks to the Steam Clean option.

Top Features

Load & Go™ XL Dispenser

33" Installation Depth

Steam Clean Option

Manuals & Literature:

- Use and Care
- Energy Guide
- Installation Instructions
- Warranty



Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

3450

Dec 17/21

242624