
1-16/47 1-16/49/

316

F lof 7

AVH-308CS 30" Wall mounted hood

Lighting
Blower type
Blower performance Duct transition
Ducting Selected Model Model number Dimensions Dimensions Chimney (ducted out)
Electrical Requirements Filter type Exterior Appearence Stainless steel grade essories (optionnal) onal duct covers Soft touch with LED display
2 bulbs, 3W LED (bulbs included)
860 CFM, 6-Speed
Speed 1, 2.4 sones
Speed 6, 6.2 sones
2 aluminium micro hole filters (included)
2 Stainless steel baffle filters (included)
6" Round (Top)
Ducted
For ceiling heights up to 9'0" AVH-308CS 0712038976799 Parts and labour, in-home service 201 29 1/2" (W) x 19 3/4" (D) x 3 1/4" (H) 120V / 60Hz / 2.7 AD-884S (884mm, AVN-AVH compatible)

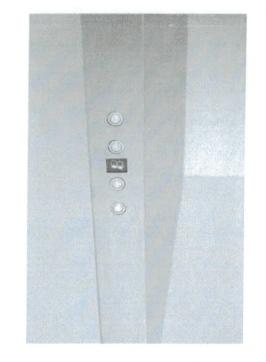

pg los 7

The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete or may change without notice


9

Jet 191-1 Apr 27/22


SF 2 of 7

AVH-308CS/368CS

Dimensions

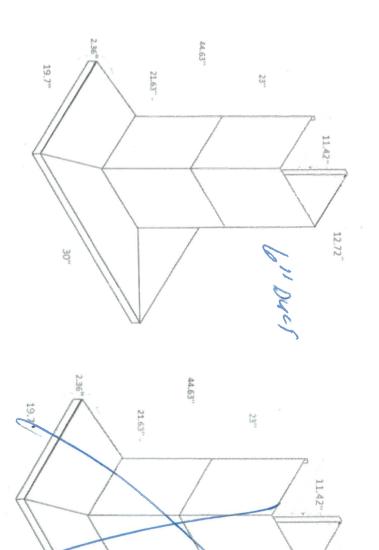

Installation



רדו	0	C	æ	A
Chimney height	Hood height	Recommended height between cooking surface and bottom of the hood	Floor to counter top height (standard)	Floor to ceiling height
Max 44.63"	2.36"	28" to 30"	36"	variable

Duct transition

36

6" round top



The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete and/or may change without notice.

Need technical support? 1(888) 651-2534

9-

25

347

Whirlpool 1.6 cu. ft. Countertop Microwave

Capacity Microwave Built-In Trim Kit (Optional) 1.6 cu, ft Capacity Control Lock Mode Add 30 Seconds Option Electronic Touch Controls General Features & Properties Total Microwave Presets 1.6 cu. ft.

Fingerprint Resistant Stainless Steel WMC30516HZ

Electrical Details

of

Dishwasher-Safe Turntable Plate

Volts Amps

D.G. Waller	13" x Product Dimensions 21-3/4" (H x W x D) 17-1/4"	Dimensions	Lighting Type Incande	Microwave Type Counte	Technical Details	
	13" x 21-3/4" x 17-1/4"		Incandescent	Countertop		

Install Guide

Use & Care Guide

Warranty

120

Also available in:

) White WMC30516HW

Black WMC30516HB

Stainless Steel WMC30516HS


Black Stainless Steel **WMC30516HV**

Key Features & Benefits

Sensor Cooking
Automatically tracks the cooking progress of your food and adjusts the cook time as needed.

1,200-Watt Cooking Power Get quick and even cooking with 1,200 watts of cooking power.

Recessed Glass Turntable
Heat larger items like cooking bowls so
you can prepare vegetables, party mix
or soups in the microwave.



NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice. ad Printed in the II S & DONOTOLYXE WAACGORIGHS

4 of


INSTALLATION INSTRUCTIONS

Tools and Parts

Tools Needed

Gather the required tools and parts before starting installation. Read and follow the instructions provided with any tools listed here.

- Pencil Measuring tape
- Dri 7/64" drill bit
- Phillips screwdriver

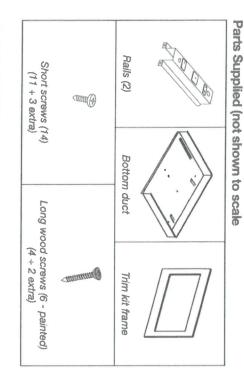


Location Requirements

The microwave oven may be installed over a built-in oven. If installing over a built-in oven, make sure there is a minimum of 3" (7.6 cm) between the top of the lower oven cutout and the microwave oven cutout floor.


The microwave oven may also be installed in a cabinet by itself (without a built-in oven below). For best usability, we recommend a minimum distance of 36" (91.4 cm) from the floor to the cutout floor.

Make sure the surrounding cabinetry has clearance to open and close freely. Allow a clearance of at least 19/6" (4.0 cm) below the cutout floor (3" [7.6 cm] for installation above a built-in oven), and a clearance of at least 2" (5.1 cm) above the cutout opening.



- A. Upper cabinet
 B. Microwave oven cutout
 C. Lower oven cutout
 - D. Lower cabinets E. Floor

Required Cutout Dimensions




A. Trim kit frame overhang

B. Cutout for lower oven

NOTES:

- Height dimension is critical: 17" (43.2 cm) minimum, (43.5 cm) maximum.
- Width and depth measurements have $\pm 1/16$ ° (2 mm) tolerance.
- 3" (7.6 cm) minimum dimension is from lower oven cutout ceiling to microwave oven cutout floor.
- Trim kit frame extends 11/6" (2.7 cm) above and below the cutout opening.

Trim Kit Frame Dimensions



*27" (68.6 cm) trim kit


1ct 191-1

2/22/2022


NN-SD765S Countertop - Panasonic Canada

3F

5 of 7

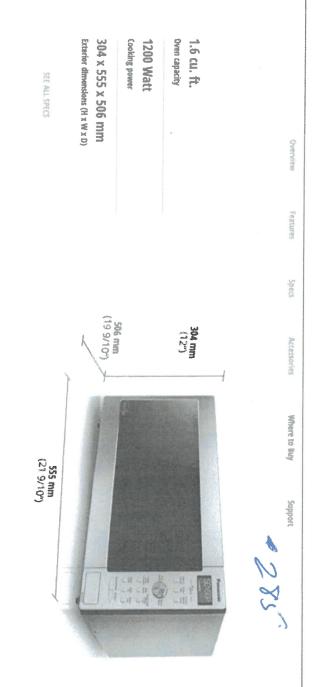

MuSD7655,

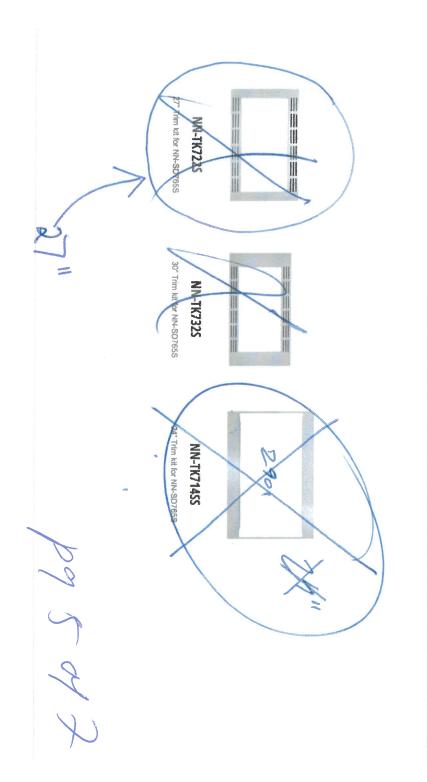

https://www.panasonic.com/ca/consumer/home-appliances/microwave -ovens/countertop/nn-sd765s.html


are

doing mith

27" trim kit)

3

- Installation Diagram
- N Schéma d'installation
- N Diagrama de instalación

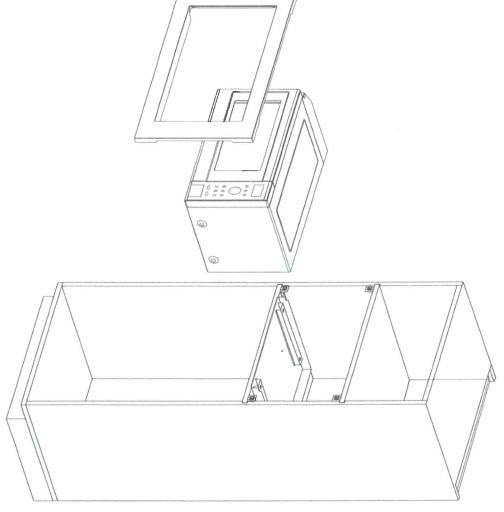

(53)

Denth (Thickness) 20 mm (3/*)	Height 410 mm (16 1/8")	Width 596 mm (231/2")	Trim Kit Dimensions	
) 1/8"))1/2")		

Dimensions du nécessaire d'encastrement	d'encastrement
Largeur	596 mm (231/2 po)
Hauteur	410 mm (16 1/ ₈ po)
Profondeur (épaisseur)	20 mm (¾ po)

Dimensiones del juego de acabados	de acabados
Ancho	231/2" (596 mm)
Altura	16 1/s" (410 mm)
Profundidad (grosor)	%" (20 mm)

CFI

2014-9-13 13:41:35


1c+ 191-1

SF

4

7 of 7

- 3. Cabinet Diagram and Dimensions
- 3. Schéma de l'armoire et dimensions
- 3. Dimensiones y diagrama del gabinete

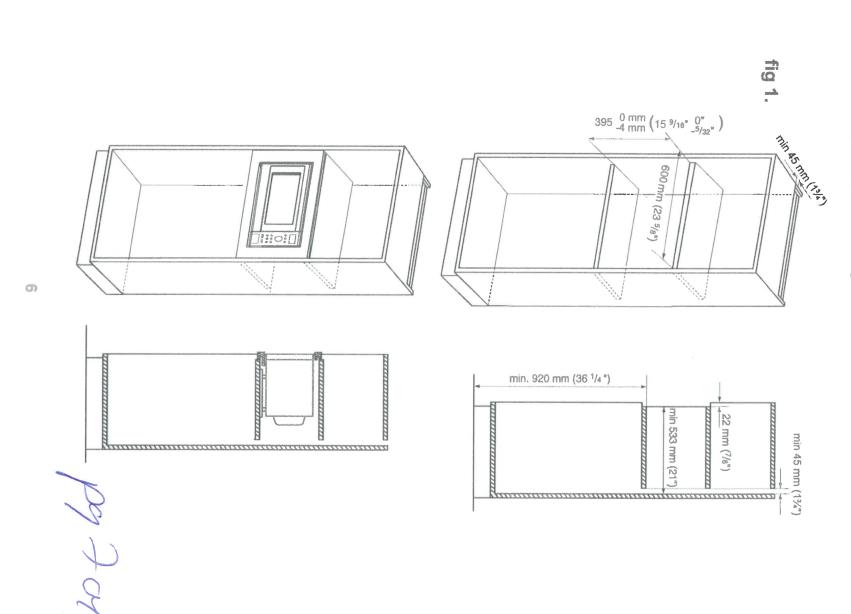

199

_F0313BE90AP_10_140313.indd Sec1:6

(

2014-3-13 13:41:35

9