


ELICA PRO SERIES  
AREZZO



Arezzo provides professional grade performance, while being discreetly mounted inside the cabinetry. Available in 28 1/2" width with a 600 CFM blower, and equipped with a 1200 CFM blower for widths of 34 1/2", 40 1/2" and 46 1/2" for extraordinary ventilating power. The extra depth (22") is ideal for supporting powerful professional ranges. Plus the All-In-One design avoids the need to purchase a stainless liner. Hidden metallic in/out knob controls operate the 4-speed blower and LED lighting.

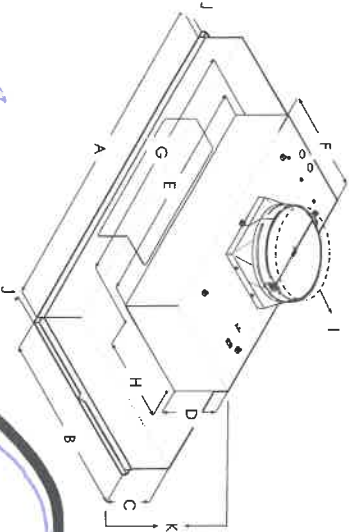

A	28 1/2" (72.4 cm)	34 1/2" (87.6 cm)	40 1/2" (103 cm)	46 1/2" (118 cm)
B	22" (55.9 cm)	22" (55.9 cm)	22" (55.9 cm)	22" (55.9 cm)
C	57 1/8" (13.8 cm)			
D	6 1/2" (16.4 cm)			
E	27 7/8" (70 cm)			
F	12 7/8" (31.6 cm)			
G	29 13/16" (75.7 cm)			
H	10 1/8" (25.7 cm)			
I	10" (25.4 cm)			
J	3/4" (1.9 cm)			
K	12" (30.4 cm)			

30827

ELICA PRO SERIES  
AREZZO



SPECIFICATIONS

	28" Unit	34" Unit	40" Unit	46" Unit
Model:	EAR628S3 EAR628S4	EAR134S3 EAR134S4	EAR140S3 EAR140S4	EAR146S3 EAR146S4
Dimensions:	28 1/2"W x 22"D x 11 1/2"H	34 1/2"W x 22"D x 11 1/2"H	40 1/2"W x 22"D x 11 1/2"H	46 1/2"W x 22"D x 11 1/2"H
Blower Type (Internal):	600 CFM (4-speed)	1200 CFM (4-speed)	1200 CFM (4-speed)	1200 CFM (4-speed)
Blower Performance:	Speed 1	90 CFM	380 CFM	380 CFM
	Speed 2	330 CFM	660 CFM	660 CFM
	Speed 3	490 CFM	950 CFM	950 CFM
	Speed 4	600 CFM	1200 CFM	1200 CFM
Noise (sones):	Min:2, Max:9.6	Min:2.05, Max:7.5	Min:2.05, Max:7.5	Min:2.05, Max:7.5
Working Speed				
Finish:				
Controls:	Fully retractable rotating knobs with blue backlighting			
Illumination:	Stainless Steel			
(replaceable lamps 1 intensity)	2 LED, 7.5 Watts	2 LED, 7.5 Watts	4 LED, 7.5 Watts	4 LED, 7.5 Watts
Filter Type:	Dishwasher-Safe, Professional Stainless Steel			
Angled Baffle Filters:	1	2	2	3
Duct Transition:	10" Round with Backdraft Damper (top only)			
Installation Type:	Ducted Installation Only			
Electrical:	120V - 60 Hz			
CONSUMABLE PARTS:				
Replacement Grease Filter (1):	GF09EA	GF09GA	GF09FA	GF09EA

\*Consumable parts are sold in units of one (1). Order accordingly

PLUS FEATURES

- HUSH SYSTEM** - An exclusive sound deadening technology that effectively reduces sound levels by over 35%
- LED CONSUMER REPLACEABLE BULB** - High quality LED lighting usually requires a skilled technician to replace lamps. Avoid this expense with Elica's new LED lamps that enable homeowners to replace in seconds
- SEAMLESS CRAFTSMANSHIP** - Heavy gauge stainless steel "seamless" construction that delivers refined elegance.
- STAINLESS STEEL BAFFLE FILTERS WITH GREASE COLLECTORS** - Designed for high airflow cooking, the "S" shape design traps high volumes of grease
- PROFESSIONAL PERFORMANCE** - Special features and high performances for models with aspiration capacity between 600 and 1200 CFM's
- HEAT GUARD** - Senses extreme temperatures (>158 degrees) and automatically adjusts the blower speed to HIGH

308W



Prepared by  
Wayne Wanamaker  
wwanamaker@coastappliances.com



# KitchenAid® 48" Smart Commercial-Style Gas Range with Griddle

KFGC558JSS

## Available Finishes/Colours

- KFGC558JAV  
Matte Avocado

KFGC558JIB  
Ink Blue

KFGC558JMH  
Matte Milkshake

KFGC558JBK  
Imperial Black

KFGC558JMB  
Misty Blue

KFGC558JPA  
Passion Red

4 Additional finishes/colours available.



Satisfy your craving to create with a 48-inch KitchenAid® Commercial-Style Range with Even-Heat™ Chrome Electric Griddle. This 6-burner gas range features two versatile 20,000 BTU Ultra Power™ Dual-Flame Burners with the power and precision to successfully sear, simmer, stir-fry and sauté. The double oven with Even-Heat™ True Convection helps you achieve more consistent baking and roasting.

### Top Features

Even-Heat™ True Convection

Chrome-Infused Electric Griddle

Smart Appliance

### Manuals & Literature:

- [Dimension Guide](#)
- [Installation Guide](#)
- [Use and Care Guide](#)
- [Warranty Information](#)

Dimensions	
Height	36
Width	47 7/8

Features	
Hot Surface Indicator Light	No
Griddle	Yes, Integrated
LP Convertible	Yes - Kit Included

Configuration and Overview	
Range Type	Freestanding

Natural Gas Convertible	Yes
Power On Indicator Light	Yes
Power Outage Compatible	Yes

Exterior	
Door Removable	Yes

Cooktop Details	
Cooktop Surface Color	Black
Center Front Element-Burner Power	15,000 BTU
Cooktop Control Knob Color	Stainless Steel
Left Front Element-Burner Power	20,000 BTU/14,000 LP

Door Type	
Oven Window Size	Large

Handle Type	
Handle Color	Stainless Steel

Handle Material	
	Metal

Features	
Automatic Convection Conversion Temperature Adjust	Yes

Heating Element On Indicator Light	Yes
------------------------------------	-----

KitchenAid®


Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

290837

DIMENSIONS

COMMERCIAL-STYLE RANGES  
PRODUCT DIMENSIONS

MODEL #	48" (121.9 cm) RANGES DUAL-FUEL/GAS KFDC558J/KFGC558J	
Unit of Measurement	in.	cm
Overall Width (A)	47 <sup>7</sup> / <sub>8</sub>	121.6
Bullnose Height (B)	2 <sup>3</sup> / <sub>16</sub>	5.6
Control Panel Height (C)	5 <sup>5</sup> / <sub>16</sub>	13.5
Door Heights (D)	20 <sup>1</sup> / <sub>16</sub>	52.6
Door Bottoms to Handle Tops (E)	20	50.8
Secondary Oven Door Width (F)	17 <sup>3</sup> / <sub>4</sub>	45.1
Main Oven Door Width (G)	29 <sup>5</sup> / <sub>8</sub>	75.2
Toe-Kick Height (H)	5 <sup>1</sup> / <sub>2</sub>	14

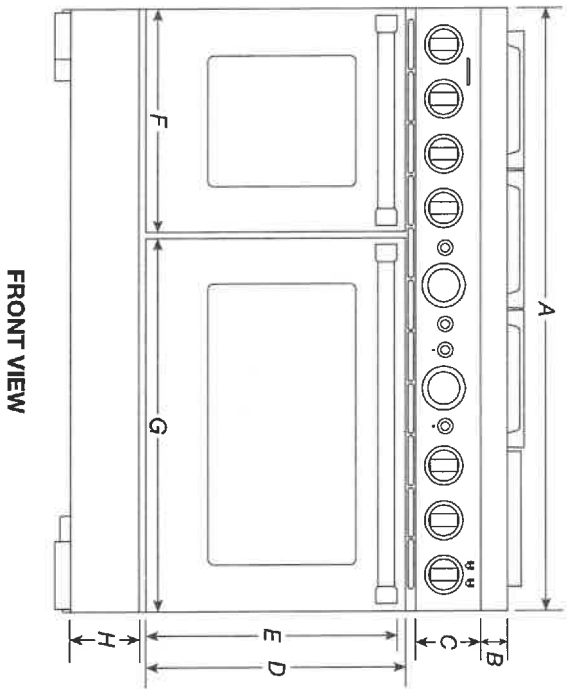

**IMPORTANT:** Dimensional specifications are provided for planning purposes only.  
**Do not make any cutouts based on this information.** Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.




708W

DIMENSIONS

COMMERCIAL-STYLE RANGES  
PRODUCT DIMENSIONS

MODEL #	48" (121.9 cm) RANGES DUAL-FUEL/GAS KFDC558J/KFGC558J	
Unit of Measurement	in	cm
Depth with Control Panel Overhang (I)	27 3/4	70.5
Depth with Handles (J)	30 1/4	76.9
Depth with Doors Fully Open (K)	46 1/2	118.1

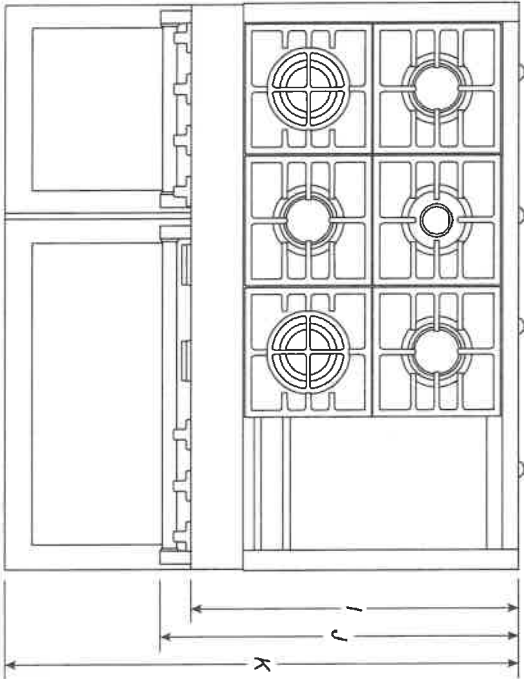

TOP VIEW

308W


**IMPORTANT:** Dimensional specifications are provided for planning purposes only.  
**Do not make any cutouts based on this information.** Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

DIMENSIONS

COMMERCIAL-STYLE RANGES  
PRODUCT DIMENSIONS

MODEL #	30" (76.2 cm) RANGES DUAL-FUEL/GAS 1-FDC500/K-FGC500J	36" (91.4 cm) RANGES DUAL-FUEL/GAS 2-FDC5061/KFGC506J	48" (121.9 cm) RANGES DUAL-FUEL/GAS KFD0558J/KFGC558J	
Unit of Measurement	in	in	in	cm
Grates Top Height (A)	37 <sup>3</sup> / <sub>16</sub>	37 <sup>3</sup> / <sub>16</sub>	37 <sup>3</sup> / <sub>16</sub>	94.5
Cooking Surface Top Height (B)	91.4	91.4	91.4	91.4
Door Top Height (C)	27 <sup>7</sup> / <sub>8</sub>	27 <sup>7</sup> / <sub>8</sub>	27 <sup>7</sup> / <sub>8</sub>	70.8
Handle Top Height (D)	27 <sup>1</sup> / <sub>8</sub>	27 <sup>1</sup> / <sub>8</sub>	27 <sup>1</sup> / <sub>8</sub>	68.9
Toe-Kick Height (E)	6 <sup>5</sup> / <sub>8</sub>	6 <sup>5</sup> / <sub>8</sub>	6 <sup>5</sup> / <sub>8</sub>	16.9
OTHER DIMENSIONS				
Maximum Feet Extension Height*	1½	3.8	1½	3.8

\* **IMPORTANT:** Minimum height dimensions are at the lowest point of the height adjustment range. When the leveling legs are fully extended, all heights have 1 1/2" (3.8 cm) of added height.

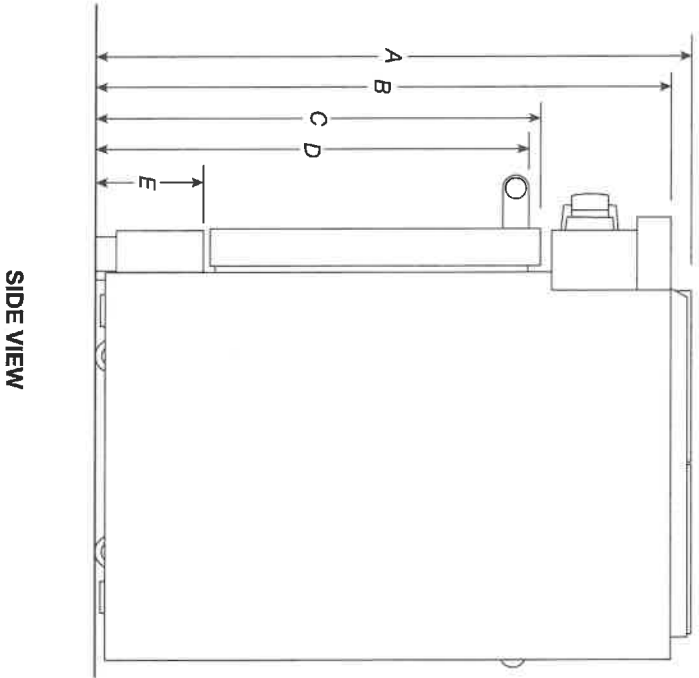

SIDE VIEW

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

2080J


DIMENSIONS

COMMERCIAL-STYLE RANGES

PRODUCT DIMENSIONS

MODEL #	30" (76.2 cm) RANGES DUAL-FUEL/GAS KFDC500J/KFGC500J		36" (91.4 cm) RANGES DUAL-FUEL/GAS KFDC506J/KFGC506J		48" (121.9 cm) RANGES DUAL-FUEL/GAS KFDC558J/KFGC558J	
Unit of Measurement	in	cm	in	cm	in	cm
Depth with Door Fully Open (F)	46½	118.1	46½	118.1	46½	118.1
Depth with Handle (G)	30¼	76.9	30¼	76.9	30¼	76.9
Depth with Control Panel Overhang (H)	27¾	70.5	27¾	70.5	27¾	70.5
Depth to Toe-Kick with Door (I)	27	68.6	27	68.6	27	68.6
Depth with Door (J)	27	68.6	27	68.6	27	68.6
OTHER DIMENSIONS						
Gas Vent Height (K)*	39	99.1	39	99.1	39	99.1

\*Gas Units only: KFGC500J, KFGC506J and KFGC558J.

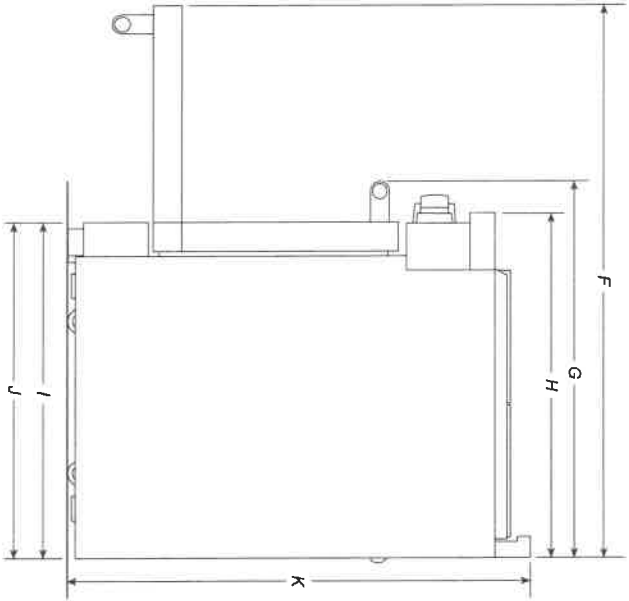

SIDE VIEW

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

KitchenAid®

2025


DIMENSIONS

COMMERCIAL-STYLE RANGES

OPENING/CLEARANCE DIMENSIONS

MODEL #	30" (76.2 cm) RANGES DUAL-FUEL/GAS KFDCC500J / FEGC500J	36" (91.4 cm) RANGES DUAL-FUEL/GAS KFDC506J / KFGC506J	48" (121.9 cm) RANGES DUAL-FUEL/GAS KFDC558J / KFGC558J	
Unit of Measurement	in	in	in	cm
Combustible Area above Cooking Surface Width (min.) (A)	30	36	48	121.9
Bottom of Cabinet Height above Cooking Surface (min.) (B)*	42	58	58	147.3
Bottom of Cabinet Height above Countertop (min.) (C)	18	18	18	45.7
Distance to Fixed Wall or Combustible Material (min.) (D)	12	12	12	30.5
Opening Width (min.) (E)	30	36	48	121.9

\* If installing a hood or hood liner above the range, follow the hood or hood liner instructions for dimensional clearances above the cooking surface.

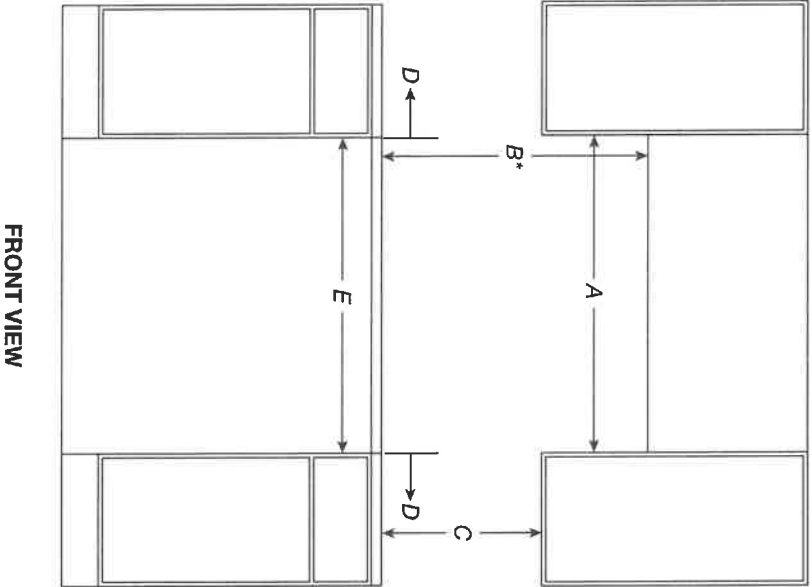

FRONT VIEW

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

**KitchenAid®**

30824



DIMENSIONS


COMMERCIAL-STYLE RANGES

OPENING/CLEARANCE DIMENSIONS

MODEL #	30" (76.2 cm) RANGES DUAL-FUEL/GAS KFDC506J/KF-GC500J		36" (91.4 cm) RANGES DUAL-FUEL/GAS KFDC506J/KF-GC506J		48" (121.9 cm) RANGES DUAL-FUEL/GAS KFDC558J/KFGC568J	
Unit of Measurement	in	cm	in	cm	in	cm
Upper Cabinet Depth (max.) (F)	13	33	13	33	13	33
Depth from Wall to Grates (G)*	1½	3.9	1½	3.9	1½	3.9
Depth from Wall to back of Unit**	0	0	0	0	0	0

\* If the back wall is constructed of a combustible material and a backsplash is not installed a 7½" (19.1 cm) minimum clearance is required.

\*\* If the back wall is constructed of a combustible material and a backsplash is not installed a 6" (15.2 cm) minimum clearance is required.

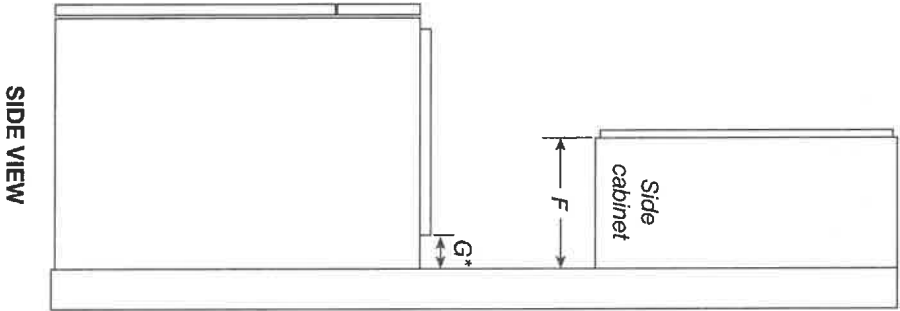

SIDE VIEW

**IMPORTANT:** Dimensional specifications are provided for planning purposes only.  
**Do not make any cutouts based on this information.** Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

2308m

DIMENSIONS

COMMERCIAL-STYLE RANGES

ELECTRICAL REQUIREMENTS

MODEL #	30" (76.2 cm) RANGES Dual-Fuel/AL/GAS KJLDC500J/KFGC500J	36" (91.4 cm) RANGES Dual-Fuel/AL/GAS KFDDC506J/KFGC506J	48" (121.9 cm) RANGES Dual-Fuel/GAS KFDDC558J/KFGC558J
Unit of Measurement	in	in	in
Electrical Zone Width (A)	22	28	40
Electrical Zone Height (B)	15	15	15
Electrical Zone Depth (C)	5	5	5


- ELECTRIC REQUIREMENTS CHECKLIST
- ☐ A 240 V, 60 Hz, fused, grounded circuit is required.

☐ For 30" (76.2 cm) and 36" (91.4 cm) ranges, use a 40 A circuit.


☐ For 48" (121.9 cm) ranges, use a 50 A circuit.

☐ A dedicated circuit is recommended.

RECOMMENDED ELECTRICAL ZONE

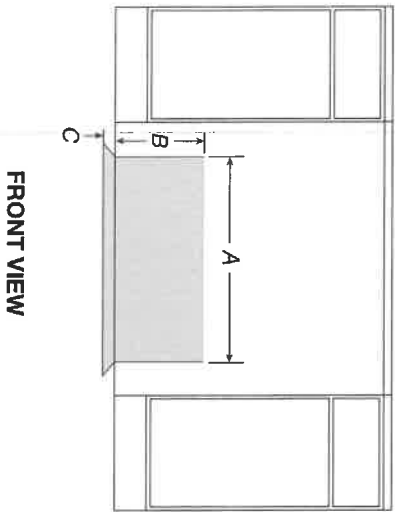

WIDTH TO ELECTRICAL CONDUIT

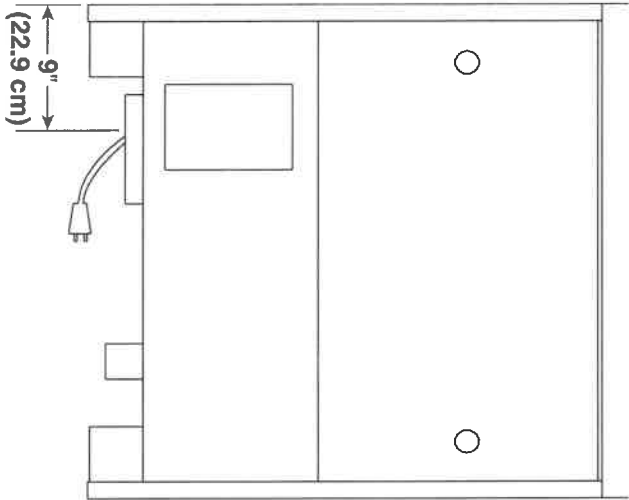

NOTE: If you have questions about your electrical supply, call a licenced, qualified electrician.

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

KitchenAid®


290830

COMMERCIAL-STYLE RANGES


GAS REQUIREMENTS

MODEL #	30" (76.2 cm) RANGES DUAL-FUEL/GAS KFDC500J/KFGC500J	36" (91.4 cm) RANGES DUAL-FUEL/GAS KFDC506J/KFGC506J	48" (121.9 cm) RANGES DUAL-FUEL/GAS KFDC558J/KFGC558J
Unit of Measurement	in cm	in cm	in cm
Gas Opening Width (A)	6 15.2	14 35.6	24 61
Gas Opening Height (B)	3 7.6	3 7.6	3 7.6
Gas Opening Depth (C)	5 12.7	5 12.7	5 12.7
Distance from Side Cabinet to Gas Opening (D)	9 22.9	9 22.9	9 22.9
Width to Gas Inlet (E)	12¾ 32.4	12¾ 32.4	12¾ 32.4

RECOMMENDED GAS ZONE

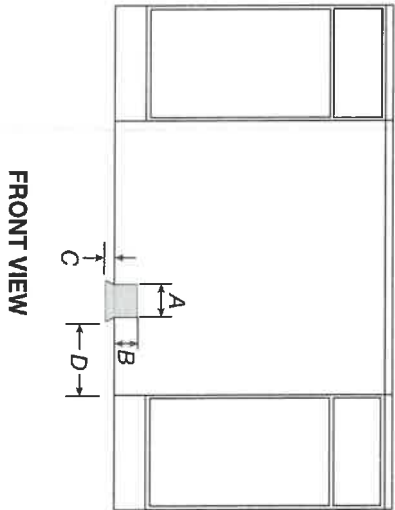

WIDTH TO GAS INLET

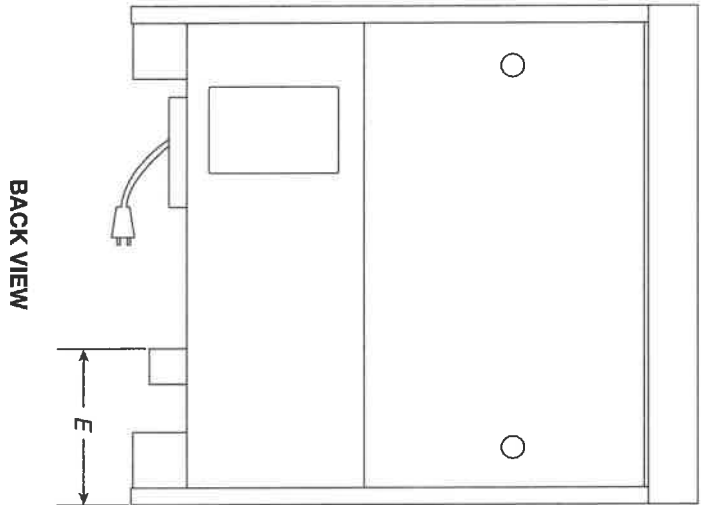

**NOTE:** If you have questions about your gas supply, call a licenced, qualified service technician.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

2088J

HOME APPLIANCES

LG DISHWASHERS

LDP6797ST

Top Control Dishwasher with QuadWash™

QuadWash™

EasyRack™ Plus with 3rd Rack and Glide Rail

Inverter DirectDrive Motor - 10 Year Warranty

44 dBA LoDecibel™ Quiet Operation


15 Place Settings

9 Wash Cycles

NeverRust™ Stainless Steel Tub

ENERGY STAR® Qualified

Available in Stainless Steel (ST) and Black Stainless Steel (BD)

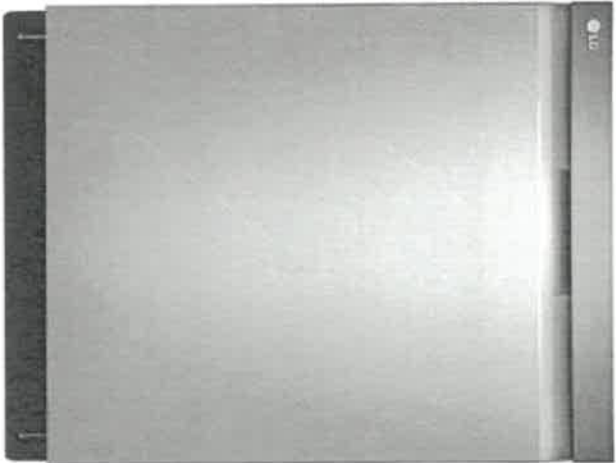

CAPACITY		
Total Place Settings		15
Upper Rack Dish Height Limit		7.1"
Lower Rack Dish Height Limit		12.5"
RACKS AND BASKETS		
Cutlery Baskets		•
Cup Rack		•
Stemware Holders		•
Fold Down Tines	(Half Fold on Upper & Full Fold on Lower)	•
BPA-Free Nylon Coated Rack and Tines		•
Rack Handle	(Upper Only)	•
Glide Rail		•
Height Adjustability	Easy One Touch (3 Level)	•
EasyRack™ Plus System		•
Upper Rack Color-Coded Foldable Tines	Half Fold	•
Lower Rack Color-Coded Foldable Tines	Full Fold	•
Height Adjustable Upper Rack		•
Height Adjustable 3rd Rack		•
STYLE AND DESIGN		
Electronic Controls		Touch
LED Indicator Lights		3
Tub Material	NeverRust™ Stainless Steel	
Tub Insulation	Damping Sheet, Sound Absorbing Material (felt), Base	
Handle	Flush Handle	
Available Colours	Stainless Steel (ST), Black Stainless Steel (BD)	
FEATURES		
LoDecibel™ Quiet Operation		44 dBA
Inverter Direct Drive Motor		•
Overflow Detector		•
120°F Inlet Water Capability		•
3-Stage Filtration System		•
SenseClean™ Wash System		•
Vario Wash		•
Variable Spray Intensities		•
No. of Spray Arms	3 (Top, Upper, Lower)	
Multi-Level Water Direction		•
Hybrid Condensing Drying System		•
Detergent and Rinse-Aid Dispenser		•

Rinse-Aid Indicator	•
Hidden Water Heater	•
Safety Float Switch (Leak)	•
Soil (Turbidity) Sensor	•
Status Indicator	•
End of Cycle Indicator	Beeper + END Indication on Display
PERFORMANCE	
Number of Wash Cycles	9 (Auto, Heavy, Delicate, Normal, Turbo, Download Cycle, Machine Clean, Rinse, Express)
Number of Wash Options	8 (Dual Zone, Half Load, Energy Saver, High Temp, Extra Dry, Delay Start (up to 12 hrs), Control Lock, Night Dry)
QuadWash™	•
ENERGY/WATER	
Water Factor (W/F)	2.8
Energy Use (kWh/Year)	258 kWh/year
ENERGY STAR® Qualified	•
CEE Tier	1
DIMENSIONS	
Unit Dimensions (WxHxD)	23.75" x 33.6" x 24.6"
Depth with Door Closed (Handle)	27 1/8"
Depth with Door Open	50.5"
Carton Dimensions (WxHxD)	28" x 34.7" x 29.6"
Clearances (WxHxD)	24" x 33.5" x 24"
Weight (Unit/Carton)	83.8 lbs / 95.9 lbs
LIMITED WARRANTY	
2 Years Parts and 1 Year Labour, 5 Years on Control Board/Rack and Liner/Tub, 10 Years on Inverter Direct Drive Motor	
UPC CODES	
LDP6797ST (Stainless Steel)	772454 068874
LDP6797BD (Black Stainless Steel)	772454 068867

© 2017 LG Electronics Canada, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require internet access. Content and services may vary by product and are subject to change without notice. 03/09/2017

20 Neweco Drive, North York, Ontario M9L 2K6 | Tel: 647-253-6300 | Customer Service & Parts 1-888-542-2623

LG.com

208W

HOME APPLIANCES

LG REFRIGERATION

LRMVC2306\_  
4-Door French Door Refrigerator

- Counter Depth
- InstaView™ Door-in-Door®
- Door-in-Door® with adjustable bin
- Full-Convert™ Drawer
- Dual Ice Maker with Craft Ice™
- Smart Cooling Plus™ System
- PrintProof™
- Micro Surface LED
- Door Cooling +
- CoolGuard™ Metal Back Wall
- Measured Fill
- LG ThinQ® App Compatible
- SmartDiagnosis™
- ENERGY STAR® Qualified


Enjoy new ways to control your home with LG smart appliances

- Get an alert when kids forget to close the door
- Make more ice while you're at work

works with the LG ThinQ® app

works with Google Assistant

works with alexa

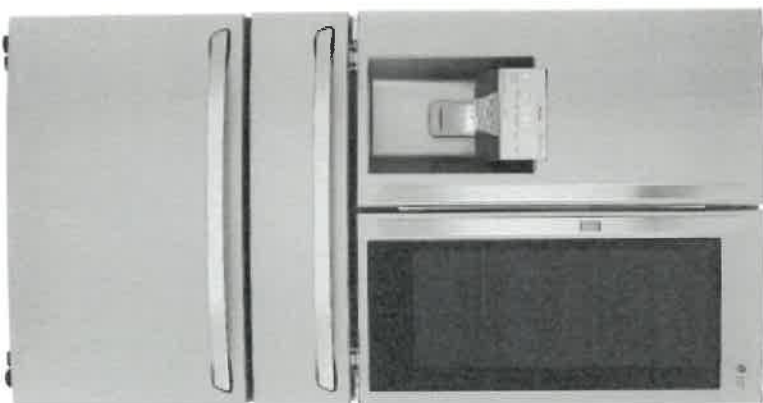

CAPACITY	
Refrigerator (cu.ft.)	13.20
Full-Convert™ Drawer	2.80
Freezer (cu.ft.)	6.50
Total Capacity (cu.ft.)	22.50
ENERGY	
Energy Consumption (kWh/Year)	716
ENERGY STAR® Qualified	Yes
WATER & ICE SYSTEM	
Ice & Water Dispenser	Yes
Dispenser Type	Integrated Ice & Water Dispenser
Measured Fill	Yes
Daily Ice Production (lbs)	3.5 lbs
IcePlus™ Production (lbs)	3.8 lbs
Craft Ice™ Daily Ice Production	0.4 lbs
Ice Storage Capacity (lbs)	3.0 + 3.3 lbs
Ice System	Slim SpacePlus®
Dual Ice with Craft Ice™	Yes
Dispenser Light	Yes
Water Filter	LT1000P
COOLING	
Linear Compressor	Yes
Smart Cooling Plus™ System	Yes
Door Cooling+	Yes
Multi-Air Flow™ System	Yes
Temperature Sensors	9
Fresh Air Filter	2
Evaporator	
CONVENIENCE	
Display Type	Smooth Touch Control / White LED
Temperature Controls	Electronic/Digital
Door Alarm	Yes
Child Lock	Yes
Auto Closing Door Hinge	Yes
Sabbath Mode	Yes
LoDecibel™ Quiet Operation	Yes
REFRIGERATOR	
No. of Shelves	4 Split (3 Fixed+1 Folding)
Folding Shelf	1
Cantilevered Shelves	Yes
Shelf Construction	Spill Protector™ Tempered Glass
Crisper Bins	2 Humidity Crisper
CoolGuard™	Yes
Refrigerator Light	Micro Surface LED
Full-Convert™ Drawer	
Dividers	Yes
Temperature Range (°F)	-7, 29, 33, 37, 41
Handle Type	SmartPull™

REFRIGERATOR DOOR	
InstaView™ Door-in-Door®	Yes
Adjustable Door-In-Door® Bin	Yes
No. of Bins	6
Door Bin Construction	1 Piece (Clear)
FREEZER	
Door Type	Pull Drawer
Drawers	3-Tier Organization
DuraBase™ Solid Drawer Base	Yes
Drawer Divider	Yes
Ice Bin / In-Door Ice	IceMaker & Ice bin in the freezer
Freezer Light	Premium LED
Freezer Handle	SmartPull™ Handle
Smart Features	
Wi-Fi Enabled	Yes
ThinQ®	Yes
Works with	Google Assistant, Amazon Alexa
SmartDiagnosis™	Yes
MATERIALS AND FINISHES	
Contour Door	Yes
Hidden Hinges	Yes
Surface	Smooth
Fingerprint & Smudge Resistant Exterior	Yes
Handles	Matching Commercial Handles
All Available Colors	PrintProof™ Stainless Steel
PrintProof™ Black Stainless Steel	
DIMENSIONS/CLEARANCES/WEIGHTS	
Depth with Handles	31 2/9"
Depth without Handles	28 7/9"
Depth without Door	24"
Depth (Total with Door Open)	43 1/9"
Height to Top of Case	69"
Height to Top of Door Hinge	70 1/4"
Width	35 3/4"
Width (Door Open 90° with Handle)	45"
Width (Door Open 90° without Handle)	40"
Door Edge Clearance with Handle	4 5/8"
Door Edge Clearance without Handle	2 1/4"
Installation Clearance	Sides 1/8", Top 1", Back 2"
Weight (Unit/Carton)	371 lbs./ 404 lbs.
Carton Dimensions (WxHxD)	38" x 73" x 33"
LIMITED WARRANTY	
Parts & Labor	1 Year
Sealed System (Parts & Labor)	5 Years
Compressor (Parts & Labor)	5 Years
Linear Compressor (Parts Only)	6-10 Years
UPC CODES	
LRMVC2306S (PrintProof™ Stainless Steel)	048231806183
LRMVC2306D (PrintProof™ Black Stainless Steel)	048231806190

© 2019 LG Electronics USA, Inc. All rights reserved. LG Life's Good is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require internet access. Content and services may vary by product and are subject to change without notice. 4/9/20

230813