

FRIGIDAIRE

GALLERY



Electric Cooktop

Available Products: GCCE3670AS, GCCE3670AD

Available Colors: Stainless Steel, Black Stainless Steel

Version: 12/22



Product Specifications


Cooktop		Cooktop Performance	
Cooking Surface Type	Smooth	Center Rear Element Burner Size (Large)	12"
Hot-Surface Indicator Light	Yes	Right Front Element Burner Size	6"
<u> </u>		Right Rear Element Burner Size	7"
Controls		Left Front Element Burner Size	6"
Sabbath Mode	No	Left Rear Element Burner Size	9"
Substitution of the substi		Center Rear Element Burner Size (Small)	9"
Dimensions and Volume		Right Front Element Burner	1,200 Watts
	2 5/8"	Right Rear Element Burner	1,800 Watts
Height Width	36 3/4"	Left Front Element Burner	1,200 Watts
	21 3/8"	Left Rear Element Burner	3,200 Watts
Depth	5"	Center Rear Element Burner (Small)	1,800 Watts
Cutout Height	33 7/8"	Center Rear Element Burner (Large)	3,000 Watts
Minimum Cutout Width	19 1/8"		
Minimum Cutout Depth	36 1/8"	Display	
Maximum Cutout Width		Control Location	Front
Maximum Cutout Depth	20 1/2"	Display Type	Mechanical
Installation			
	Yes	Electrical Specifications	
Installed Over a Wall Oven	Right Center	Amps @ 240 Volts	43.3 Amps
Power Supply Connection Location	Right Center	Connected Load @ 240V	10.4 kW
C .: (: .: 1.A		Minimum Circuit Required	50 Amps
Certifications and Approvals ADA Compliant	Yes	Voltage Rating	240 V
ADA Compilant	100		
		General Specifications	
		Frigidaire Fit Promise	Yes
		Prop 65 Label	Yes
		Warranty - Labor	1 Year
		Warranty - Parts	1 Year
		Safety Certifications and Approvals	
		CSA Listed	Yes
		UL Listed	Yes
		OL Listed	

Available Products: GCCE3670AS, GCCE3670AD

Available Colors: Stainless Steel, Black Stainless Steel

Version: 12/22

Installation Diagram

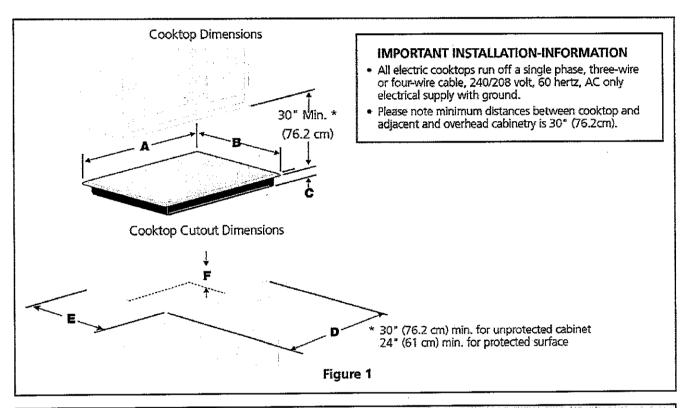

MODEL	A. LENGTH	B. WIDTH	C DEPTH	D: LE	CUTOUT D NGTH	IMENSIONS E. W	IDTH	F. DEPTH BELOW
	43-3-6-63			MIN.	MAX.	MIN.	MAX.	COOKTOP*
30"	30 ⁵ / ₈ "	21³/ ₈ "	2 ⁵ / ₈ "	28½"	29 ⁷ / ₈ "	19 ⁵ / ₈ "	20½"	5"
	(77.8 cm)	(54.4 cm)	(6.7 cm)	(72.4 cm)	(75.9 cm)	(49.9 cm)	(52.1 cm)	(12.7 cm)
36"	36¾"	21³/a"	2 ⁵ /s"	33 ⁷ /a"	36 ¹ /s"	19 ¹ / ₈ "	20½"	5"
	(93.5 cm)	(54.4 cm)	(6.7 cm)	(86.0 cm)	(91.8 cm)	(48.6 cm)	(52.1 cm)	(12.7 cm)

36" Counter-Depth 3-Door Refrigerator

800 Series - Stainless Steel B36CT80SNS





B36CT80SNS Stainless Steel

Also available in: Black Stainless Steel B36CT80SNB

Innovative VitaFreshPro® technology helps keep food fresh up to 3x longer. Enjoy less food waste, new innovative features and more thoughtful design.

Features & Benefits

VitaFreshPro® provides pre-programmed freshness settings to optimize temperature and humidity to keep meat, fish, and produce fresher, longer.

Interior Water Dispenser is thoughtfully placed inside for refreshing water at the touch of a button or a push of a nozzle.

FlexBar® utilizes typically unused space in the upper refrigerator cavity.

General Properties	
Full 72" height and true counter depth for built-in appearance	Yes
Easy Clean Stainless Steel	Yes
Lighting	Recessed LED light bars
Number of compressors/ evaporators	2/2
Defrost process refrigerator section	Frost-free
Number of shelves – refrigerator	5
Adjustable shelves – refrigerator	4 half-width
Shelf material – refrigerator	Tempered glass
Type of shelves – refrigerator	Frameless split shelves with metal trim
Flexible storage bar	FlexBar*
Gallon storage bins	2
Humidity control compartments	2
Full width temp. & numidity controlled drawer	VitaFreshPro*
Ice maker	Yes
Water filter	UltraClarityPro°
Internal water dispenser	Yes
Touch control panel	Yes
AirFresh® filter	Yes
FreshProtect® ethylene filter	Yes
MultiAirFlow [™]	Yes
Stainless steel back wall	Yes
Defrost process freezer section	Automatic
Number of drawers – freezer	3
Wi-Fi enabled	Yes, Home Connect® app

Capacity	
Total capacity	20.8 cu. ft.
Refrigerator capacity	14.8 cu. ft.
Freezer capacity	6 cu. ft.
Technical Details	
Current	15 A
Volts	115 V
Frequency	60 Hz
Power cord length	67"
Plug type	120V-3 prong
Dimensions & Weight	是一种基础
Appliance dimensions with hinges, handles and doors (HxWxD)	72"* x 35 5/8" x 31 1/8"
Appliance dimensions without hinges and doors (HxWxD)	71 1/2" x 35 5/8" x 24"**
Appliance dimensions with hinges and doors, no handles (HxWxD)	72"* x 35 5/8" x 28 3/4"
Required cutout size (HxWxD)	72" x 36" x 25"
Net weight	350 lbs
Efficiency	
Energy consumption	570 kWh/yr
ENERGY STAR® Certified	Yes
Accessories	









Ethylene Filter Refill Kit: FPETHRF50

90 Degree Door Stopper: 10012733

"As compared to a Bosch refrigerator without VitaFreshPro" technology. Results may vary among different foods.

"When leveling legs are fully extended, add 5/8" to overall height, total 72.5/8".

"The cutout depth of 25" includes the required 1" airflow. The electrical covers on the back of unit do not require additional depth.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.


For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904 © BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.


36" Counter-Depth 3-Door Refrigerator

800 Series - Stainless Steel B36CT80SNS



Installation Details

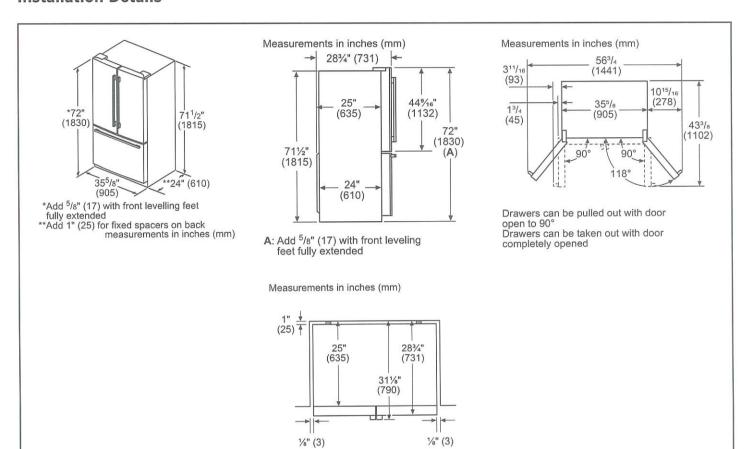

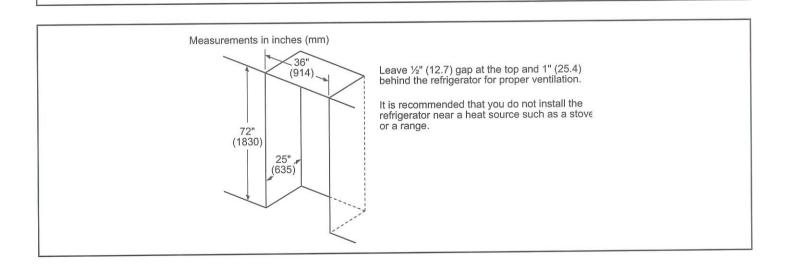

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

30" Speed Combination Oven

800 Series - Stainless Steel HBL8753UC





HBL8753UC Stainless Steel

Also available in:

HBL8743UC Black Stainless Steel

Bosch speed combination ovens create an all-in-one cooking center with an upper speed oven and a **Convection Multi-Rack** oven below.

Features & Benefits

2-in-1 microwave and convection oven with 9 SpeedChef® programs to simplify cooking with fast

Convection Multi-Rack combines a third heating element with a back fan for even browning and time savings by using multiple racks at one time.

Oven is equipped with a self-cleaning cycle that easily cleans itself via 2, 3, and 4 hour cycle options.

Download the Home Connect® app to remotely monitor and control your Bosch wall oven with your smart phone or tablet.

General Pro	perties			
Home Connect® – lower cavity (WiFi enabled)		Yes		
Oven modes – upper cavity	Speed oven; 12 Auto Programs (including Auto Defrost, Melt Butter, Soften Ice Cream, Pizza) 9 Sensor Cook Programs, 9 SpeedChef® Programs, Hi & Lo Broil, Convection Multi-Rack, Keep Warm, Frozen Foods			
Oven modes – lower cavity	Bake, Variable Broil (hi & low), Roast, Warm, Sabbath, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Pizza, Convection Multi- Rack, Convection Conversion, Temperature Probe, Fast Preheat			
Cleaning typ	e – lower	Self Clean		
Telescopic r	ack	1		
Illumination type		LED (Upper) / Halogen (Lower)		
Interior light	:s	1 Upper / 2 Lower		
Oven Perfor	mance			
Microwave pupper cavity		1000 W		
Bake / broil element – upper cavity		600 / 1,750 W		
Convection element – upper cavity		1,700 W		
Bake / broil element – lower cavity		2,400 / 3,800 W		
Convection element – lower cavity		2,000 W		
Technical D	etails			
Watts		9,600 W		
Circuit breaker		40 A		
Volts; Frequency		240 / 208 V; 60 Hz		
Power cord length		60"		
Plug type		Fixed Connection, No Plug		

Dimensions & Weight	
Overall appliance dimensions (HxWxD)	49" x 29 ³ / ₄ " x 24 ¹ / ₂ "
Required cutout size – Standard (HxWxD)	48 ⁵ /8" x 28 ¹ /2" x 23 ¹ /2"
Required cutout size – Flush (HxWxD)	49 ¹ /8" x 30" x 24 ¹ /2"
Speed oven cavity size - upper	1.6 cu. ft.
Overall upper speed oven interior dimensions (HxWxD)	9 ⁷ /8" × 16 ¹ /2" × 16 ¹ /2"
Metal turntable diameter	14 ¹ /8" dia.
Ceramic tray diameter	13 ³ /4" dia.
Rack – rectangular cookware max. – upper	15" x 12"
Oven cavity size - lower	4.6 cu. ft.
Overall lower oven interior dimensions (HxWxD)	17 ¹³ / ₁₆ " × 24 ¹ / ₈ " × 18"
Usable lower oven interior dimensions (HxWxD)	12 ¹ / ₄ " × 23 ¹ / ₄ " × 15 ¹ / ₄ "
Net weight	259 lbs
Accessories - Included	

Upper Oven: Metal Turntable, Square rack,

Ceramic Cooking Tray

Lower Oven: 1 Telescopic and 2 Standard

Oven Racks, Temperature Probe

Accessories - Optional







00449757









Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904


© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.


30" Speed Combination Oven

800 Series - Stainless Steel HBL8753UC



Installation Details

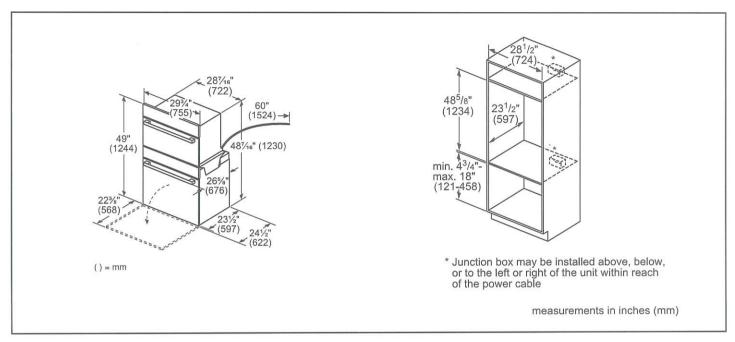

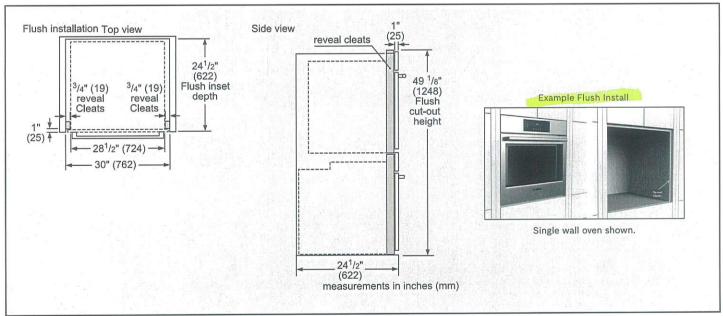

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904


30" Speed Combination Oven

800 Series - Stainless Steel HBL8753UC




Installation Details





- *Wall oven junction box may be located above or to the right or left of the unit within reach of the power cable.
- **Electrical hook-up may be located below (depending on space) or next to the drawer within reach of the power cable.

measurements in inches (mm)

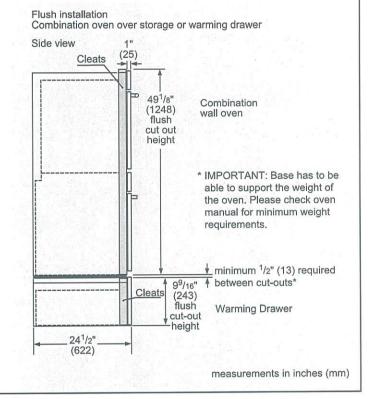

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

24" Bar Handle Dishwasher

800 Series - Stainless Steel SHX78CM5N





SHX78CM5N Stainless Steel

Also available in:

Black SHX78CM4N Stainless

PowerControl™ spray arm targets your dirtiest dishes with a deeper clean, no matter where you load them on the bottom rack.

Features & Benefits

Patented CrystalDry technology transforms moisture into heat to get dishes, including plastics, 60% drier.†

The Flexible 3rd Rack with fold down sides adds 30% more* loading area, perfect for utensils and ramekins.

Enhance your cleaning experience with Wi-Fi enabled Home Connect®. Access additional wash cycles and options or choose the right one for your needs using Smart Cycle.

So quiet at 42 dBA, InfoLight® shines on the floor so you know the dishwasher is running.

General Properties	
Number of wash cycles	5 + 3 additional in Home Connect®
Number of options	4 + 2 additional in Home Connect*
dBA	42
Wash system	PrecisionWash® with PowerControl™
Drying system	CrystalDry™
Third rack	Flexible 3rd Rack
Rack adjustability	Rackmatic*
Tub material	Stainless Steel
Control type	Touch Controls
Concealed water heating element	Yes
Leak protection system	24/7 AquaStop®
Home Connect® (WiFi enabled)	Yes
NSF*-certified** sanitize option	Yes
Water softener	No
Five-level wash	Yes
Child Lock button suspension	No
Anti-Fingerprint Finish	Yes
Special features	CrystalDry™ Option, InfoLight®
Efficiency	
Water usage per cycle	3.2 gal
ENERGY STAR® Certified	Yes
Total annual energy consumption	240 kWh
Capacity	
Number of place settings	16

Technical Details	
Watts	1440 W
Current	12 Amps
Volts .	120 V
Frequency	60 Hz
Power cord full length	67"
Power cord install length from edge of unit when facing the door	Left – 45" Right – 56"
Minimum water pressure	14 lb/sin
Length outlet hose	78 3/4"
Dimensions & Weight	4.000000000000000000000000000000000000
Overall appliance dimensions (HxWxD)	33 7/8" x 23 9/16" x 23 3/4"
Required cutout size (HxWxD)	33 7/8" x 24" x 24"
Adjustable feet	Yes
Net weight	96 lbs
Accessories-Optional	
Junction Box	SMZPCJB1UC
Junction Box + Supply Hose Kit	SMZ3IN1UC
Supply Hose Kit with Elbow	SMZSH1ABUC
Drain Hose Extension Kit	SGZ1010UC
Dishwasher Accessory Kit	SMZ5000
Flexible Silverware Basket	SMZ4000UC
Anti-Tarnish Silverware Cassette	SMZ5002UC
Edge Protector + Power Cord Clip Install Kit	SMZEPCC1UC
Flexible 3rd Rack	SMZCD200UC







Based on aggregate average drying performance of Bosch Dishwashers with CrystalDry* on combined household load including plastics, glass, steel, and porcelain as compared to Bosch Dishwashers with PureDry*. Drying performance may vary by dish type.
 *Compared to a Bosch dishwasher with 2 racks.
 **Certification to NSF/ANSI Standard 184 for residential dishwashers.

Accessories: To purchase Bosch accessories, cleaners & parts please call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty. For more information on our entire line of products, go to www.bosch-home.ca or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.


11/24 CA


24" Bar Handle Dishwasher


800 Series - Stainless Steel SHX78CM5N





Installation Details

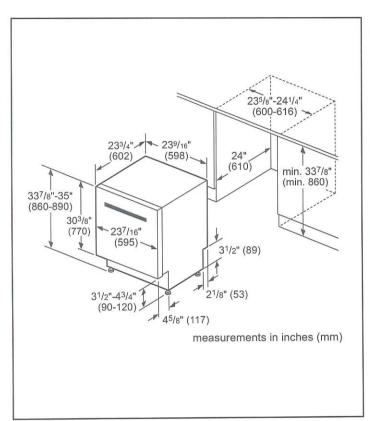

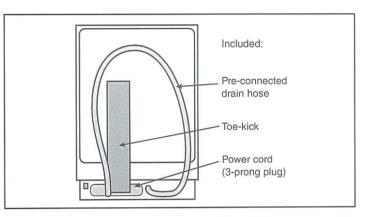

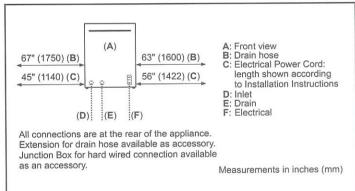

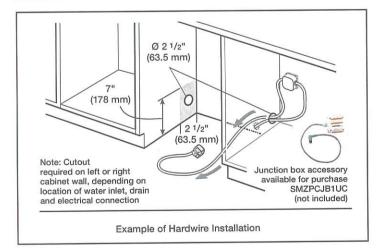

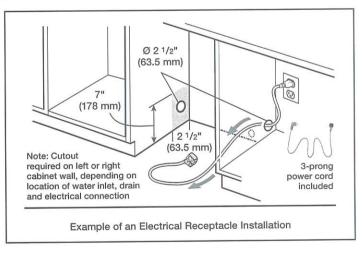

Accessories: To purchase Bosch accessories, cleaners & parts please call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.ca or call 1-800-944-2904 © BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.


11/24 CA


24" Bar Handle Dishwasher

800 Series - Stainless Steel SHX78CM5N



Installation Details





Note: Plumbing installations will vary - refer to local codes. Drain hose included is 79" (201 cm) and can be extended to a maximum of $155\ 3/4$ " (396 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.