


FRIGIDAIRE
GALLERY

FGHD2368T D/F

FRENCH DOOR
REFRIGERATOR
21.7 CU. FT. COUNTER-DEPTH

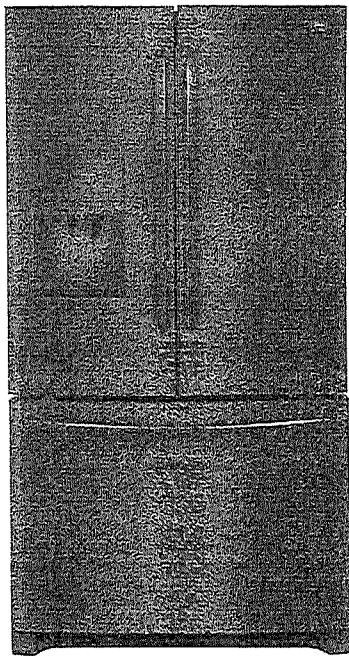

AVAILABLE
COLORS



PRODUCT DIMENSIONS

Height (Including Hinges & Rollers)	69-7/8"
Width (Doors)	36"
Depth (Including Door)	28-1/2"

MORE EASY-TO-USE FEATURES

Even Temp™
Even temperature throughout the refrigerator.

Adjustable Interior Storage
Over 100 ways to organize and customize your refrigerator.

Store-More™ Flip-Up Shelves
Easily make room for tall or large items.

Multi-Level LED Lighting
Corner-to-corner LED lighting throughout the refrigerator for better visibility.

Store-More™ Shelves
More space to store your food with edge-to-edge shelves.

Full-Width Cool-Zone™ Drawer
A large capacity Cool Zone™ drawer extends completely and provides space to easily store anything from sheet cakes and large platters to snacks and juice boxes.

Express-Select® Controls
Easily select options with the touch of a button.

Freezer Basket with Divider
Deep freezer storage with adjustable divider keeps food organized and accessible.

Effortless™ Glide Freezer Drawers
Drawers glide out smoothly and fully extend, giving you easy access to what's inside.

Quick Freeze
Quickly freeze foods so they stay at their freshest.

Store-More™ Bins
Our bins are designed to store more, so you can fit gallon size beverages.


CERTIFICATIONS

ENERGY STAR™




Star-K™ Certified (Sabbath Mode)


SIGNATURE FEATURES

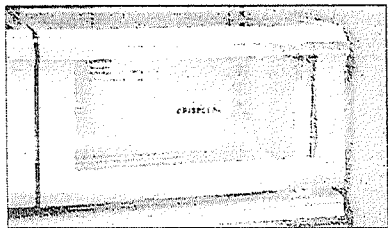


Crisp Seal™
Sealed humidity-controlled crispers maintain moisture for market-fresh produce.

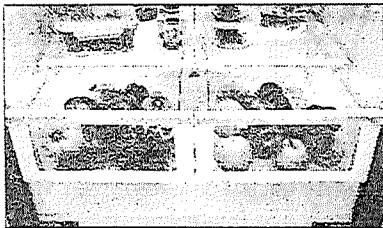

Effortless™ Glide Crisper Drawers
Our humidity-controlled crisper drawers can be configured any number of ways, either side-by-side or stacked on top of each other so you can organize your refrigerator the way you want.

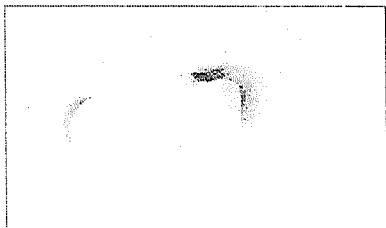

PureSource Ultra™ II Ice & Water Filtration
Discover how our genuine filtration works to keep your water cleaner. PureSource Ultra™ II Water Filters remove 99.3% of lead and 99.9% of cysts from your household water.

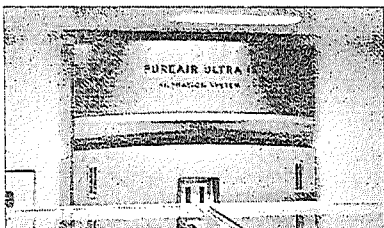

PureAir Ultra™ II Filters
Our PureAir Ultra™ II air filters effortlessly keep the air in your refrigerator fresh.

frigidaire.com / frigidaire.ca

Project: Rathwell Landing
Plan No. 4M-1589
Lot: 298
Model: McCabe 1016

Feb 17, 2020

FGHD2368T D/F
FRENCH DOOR REFRIGERATOR
21.7 CU. FT. COUNTER-DEPTH

FRIGIDAIRE
GALLERY

FEATURES

Door Design	Tall Soft-Arc
Door Handle Design	Black, Stainless (D), Stainless Steel (F)
Cabinet Finish	Black (D), Grey (F)
Door Stops / Door Closers	Yes / Yes
Door Hinge Covers	Hidden
Rollers - Front / Rear	Adjustable / Yes
Water Filter Location	Top-Right Fresh Food Section
Sound Package	

DISPENSER

Controls	Express-Select™
Dispenser Design	Flush, Single-Paddle
Number of Dispenser Buttons	11
Crushed Ice / Cube Ice / Water	Yes / Yes / Yes
Ice Option / Freeze Option	No / Quick Freeze
Display On / Off Option	Yes
Lock / Light	Yes / Yes
Temp / Door Ajar / Power Failure Alerts	Yes / Yes / Yes
Water Filter Change Indicator Light	Yes
Air Filter Change Indicator Light	Yes

REFRIGERATOR FEATURES

Lighting	Multi-Level Designer LED
Water Filter Type	PureSource Ultra® II
Air Filter Type	PureAir Ultra® II
Quarter-Width Fixed Shelves	1 Flip-Up Store-More™
Half-Width Fixed Shelves	3 Store-More™
Quarter-Width Sliding Shelves	
Half-Width Sliding Shelves	
Cantilever Shelves	Yes
Store-More™ Full-Width Drawer	1 Cool Zone™
Hanging Wine Rack / Can Dispenser	
Crisper Drawer / Humidity Controls	2 Clear / 2
Dairy Compartment	
Store-More™ Fixed Door Bins	2 Clear (1 per door)
2-Liter Fixed Door Bins	1 Clear
Gallon Adjustable Door Bins	2 Clear
2-Liter Adjustable Door Bins	1 Clear
Dispenser Bin	1 Clear
Non-Slip Bin Liner / Bottle Retainers	Yes / Yes

FREEZER FEATURES

Self-Closing Pull-Out Drawer	Yes
Sliding Full-Width Freezer Baskets	2 Effortless™ Glide
Basket Dividers	1 (Bottom Basket)
Lighting	LED
Automatic Ice Maker (2nd Ice Maker)	Optional

CERTIFICATIONS

ENERGY STAR®	Yes
Sar-K® Certified (Shabbath Mode)	Yes

SPECIFICATIONS

Total Capacity (Cu. Ft.)	21.7
Refrigerator Capacity (Cu. Ft.)	14.9
Freezer Capacity (Cu. Ft.)	6.8
Power Cord Connection Location	Right Bottom Rear
Water Inlet Connection Location	Left Bottom Rear
Voltage Rating	120V / 60Hz
Connected Load (kW rating) @ 120 Volts¹	1.02
Amps @ 120 Volts	8.5
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	347 Lbs.


¹For use on adequately wired 120V dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

PRODUCT DIMENSIONS

A-Height (Including Hinges & Rollers)	69-7/8"
B-Cabinet Width / Door Width	35-7/8" / 36"
C-Depth (Including Door)	28-1/2"
Depth with Door Open 90°	42-1/2"
Depth with Drawer Fully Extended (Including Handle)	45-1/2"

"BUILT-IN LOOK" CUTOUT DIMENSIONS

Height (Including Hinges and Rollers)	70-1/4"
Width	36"
Depth	25"

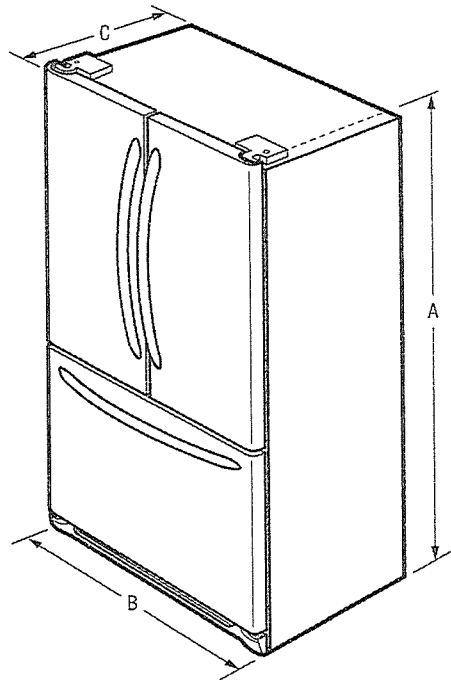

Feb 17, 2020
Rathwell Landing
44-1589
298
Model: McCabe 1016




Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca. Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca.

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FGHD2368T 10/17
©2017 Electrolux Home Products, Inc.

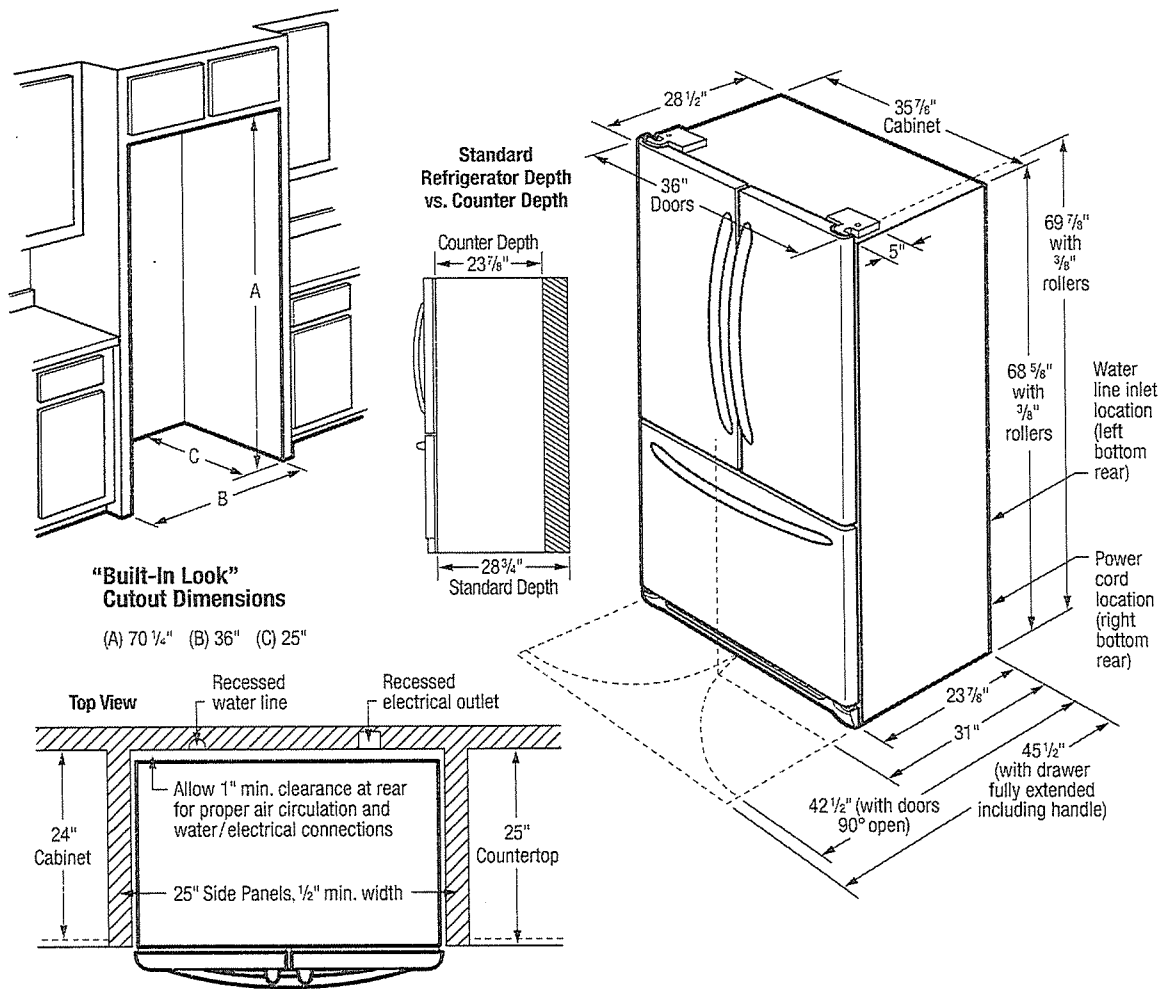

INSTALLATION SPECIFICATIONS

- Product Shipping Weight (approx.) – 347 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.
- Voltage Rating – 120V/60 Hz
- Connected Load (kW Rating) @120 Volts = 1.02 kW
- Amps @ 120 Volts = 8.5 Amps
- Always consult local and national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120° to 180° door swing, providing complete drawer/crisper access and removal. (Absolute 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide drawer/crisper access with restricted removal.)
- To ensure optimum performance, avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.

- For proper ventilation, front grille MUST remain unobstructed.
- Recess electrical outlet when possible.
- Water recess on rear wall recommended to prevent water-line damage.
- Water Pressure – Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.
- Adjustable front rollers to assist with door alignment.

"BUILT-IN LOOK" SPECIFICATIONS

- Minimum opening of 70-1/4"H x 36"W x 25"D required to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- Remove all wall/floor molding prior to installation.



FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca. Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca.

FGHD2368T 10/17

©2017 Electrolux Home Products, Inc.


Feb 17, 2020
Project: Rathwell Landing
Plan No. 4M-1589
Lot: 298
Model: McCabe 1016



FGGC3047QS

Frigidaire Gallery 30"
Gas Cooktop

AVAILABLE
COLORS

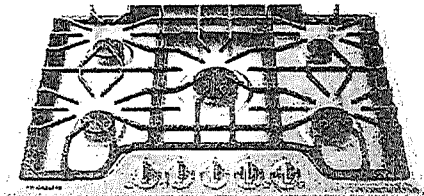

SIGNATURE FEATURES

Angled Front Controls
Easy to use angled front controls

Dishwasher-safe cast iron
grates
Easy to Clean with dishwasher-safe
cast iron grates

Continuous corner-to-corner
grates
Move Heavy Pots & Pans without
lifting with continuous, corner-to-
corner grates

SpillSafe™ Cooktop
Cooktop contains your spills for
easier clean up.

PRODUCT DIMENSIONS

Height	4-1/4"
Width	30"
Depth	21-3/4"

MORE EASY-TO-USE
FEATURES

Seamless Recessed Burners
Easy to Clean with seamless
recessed burners.

Low Simmer Burner
Perfect for delicate foods and
sauces.

Approved Over Frigidaire®
Electric Wall Ovens
Cooktops are approved for
installation above any of our Single
Electric Wall Ovens.

Durable Stainless Steel
Cooktop
Premium look that stands up to
every day use.

Express-Select™ Controls
Easily go from warm to boil.

Power Burner
Power Burner offers more power
and faster boil time.

Feb 17, 2020

Project: Rathwell Landing
Plan No. 4M-1589
Lot: 298
Model: McCabe 1016

CERTIFICATIONS
ADA Compliant




frigidaire.com/frigidaire.ca

FGGC3047QS
Frigidaire Gallery 30" Gas Cooktop



General Specifications		Dimensions: Cut-Out	
Shipping Weight (lbs)	55	Width	27-1/4" - 28-1/2"
PROP 65 Label	Yes	Depth	19-1/8" - 19-3/4"
Made In USA	No	Height	8"
Reconditioned	No	Cooktop	
Gas Connection Location	Right Rear	Grates	3 Continuous Grates
Product Weight (lbs)	51	Left Rear	7500 BTU
Power Type	Gas	Grate Color	Black Matte
Size	30"	Electronic Ignition	Electronic Pilotless
Installation Type	Drop-In	Center	450 - 18000 BTU
Collection	Frigidaire Gallery	Right Rear	5000 BTU
Installation Type		Grate Material	Cast Iron
Oven Combo Approved	Yes	Left Front	9500 BTU
Controls		Right Front	12000 BTU
Control Location	Front	Certifications & Approvals	
Cooktop Specifications		Agency Approval(All Brands)	CSA
Knob Color	Stainless Steel	ADA Compliant - All Brands	Yes
Electrical Specifications		Sabbath Mode	No
Connected Load @ 120V	0.12	Accessories	
Voltage Rating	120V 60Hz	LP Conversion Kit	Included
Amps @ 120 Volts	1	Dimensions: Exterior	
Min Circuit Required	5A	Width	30"
Connection Location	Right Rear	Height	4-1/4"
		Depth	21-3/4"

 **Notes:** For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca.
Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5655 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca


FGGC3047QS
©2017 Electrolux Home Products, Inc.

Feb 17, 2020
Project: Rathwell Landing
Plan No. 4M-1589
Lot: 298
Model: McCabe 1016



FGMC3066UD

Frigidaire Gallery 30"
Electric Wall
Oven/Microwave
Combination

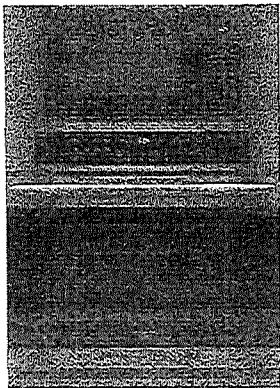

AVAILABLE
COLORS



MORE EASY-TO-USE
FEATURES

Sensor Cooking Options
Microwave automatically adjusts power levels and cooking times to cook a variety of items, effortlessly.

Smudge-Proof® Black Stainless Steel
Practical has never looked so stylish with Smudge-Proof® Black Stainless Steel, a beautiful new finish with an easy-to-clean fingerprint resistant surface.

Our Largest Capacity Oven
Cook more at once with 5.1 cubic feet of oven capacity.

Over 30 Setting Options
Offers multiple settings to meet your cooking needs, including chicken nuggets and snacks.


Easy to Clean with Self-Cleaning
Your oven cleans itself - so you don't have to. Self clean options available in 2, 3, and 4-hour cycles.

Effortless™ Reheat
Reheat almost anything at the touch of a button.


One-Touch Keep Warm Setting
Just one touch of a button keeps food warm until everything - and everyone - is ready.

CERTIFICATIONS
Star-K® Certified (Sabbath Mode)


SIGNATURE FEATURES

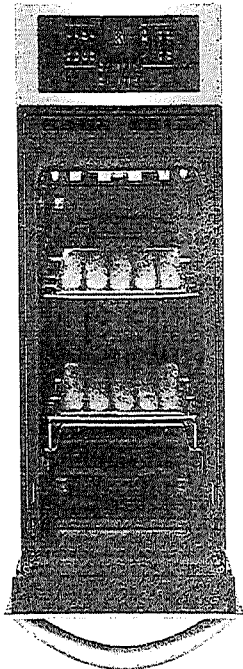

Faster, More Even Baking Results with True Convection
Get faster, more even multi-rack baking with a powerful convection fan and third heating element that evenly circulates hot air throughout the oven.

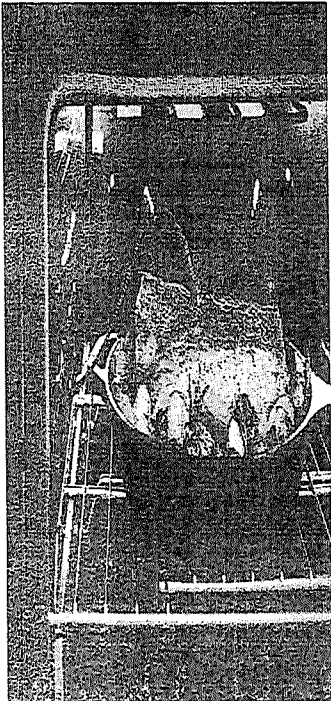

Effortless™ Temperature Probe
The Effortless™ Temperature Probe detects and alerts when the desired finished cooking temperature has been reached and automatically switches to the keep warm setting.



frigidaire.com/frigidaire.ca

Feb 17, 2020
Project: Rathwell Landing
Plan No. 4M-1589
Lot: 298
Model: McCabe 1016

FGMC3066UD

Frigidaire Gallery 30" Electric
Wall Oven/Microwave
Combination



General Specifications		Microwave Oven Controls	
Product Weight (lbs)	275	Auto Cook Options	3 Options (Bacon Frozen Entree Rice)
PROP 65 Label	No	Baked Potato	Yes
Power Type	Electric	Chicken Nuggets	No
Size	30"	Defrost Options	3 Options (Meat Poultry Fish)
Installation Type	Built-in	Keep Warm	No
Collection	Frigidaire Gallery	Melt/Soften	4 Options (Butter Chocolate Ice Cream Cream Cheese)
Oven		Numerical Pad	Yes
Bake	2200 Watts	Popcorn	Yes
Baking System	True Hidden Bake	Power Level Button	Yes
Broil	6 pass 4000 Watts	Reheat Options	3 Options (Dinner Plate Soup/Sauce Casserole)
Broiling System	Variable (400°F to 550°F)	Sensor Cook Options	4 Options (Frozen Breakfast Ground Meat Fish or Seafood Chicken Breast)
Cleaning System	Self Clean w/Steam Clean Option	Sensor Reheat	No
Convection	2500 Watts	Snack Options	No
Convection System	Single Fan	Start Button	Yes
Oven 1 Interior Color	Midnight Black	Stop Button	Yes
Oven 1 Interior Depth	19-1/2"	Timer	Yes
Oven 1 Interior Height	18-5/8"	User Preferences	Yes
Interior Lighting	2 Halogen	Veggies Button	Yes
Oven 1 Interior Width	24-1/8"	Dimensions: Cut-Out	
Rack Configuration	1 HD Handle 1 Offset	Depth	23-3/4"
Rack Positions	6 positions	Height	41-1/8" - 41-1/4"
Type	Main	Width	28-1/2" - 29"
Window	Large	Capacities	
Internal Specifications		Microwave Capacity (Cu. Ft.)	1.6
Microwave Interior Depth	18-5/8"	Oven 1 Capacity	5.1
Microwave Interior Heigh	10-1/2"	Microwave Oven Specifications	
Microwave Interior Width	17-3/8"	Frequency (MHZ)	2450
Certifications & Approvals		Interior Light	LED
ADA Compliant - All Brands	No	Turntable Diameter	13.5"
Agency Approval(All Brands)	UL	Accessories	
Sabbath Mode	Yes	Meat Probe	Yes

Feb 17, 2020

Project: Rathwell Landing

Plan No. 4M-1589

Lot: 298

Model: McCabe 1016

Cooking Controls

Add-a-Minute	Yes
Bake	Yes
Cook Duration	Yes
Broil	Variable
Cancel Button	Yes
Convect	Bake Roast
Convection Conversion	Yes
Automatic Oven	Multiple Functions
Keep Warm	Yes
Lockout	Yes
Keypad Entry Time & Temp	Yes

Oven Light	Yes
Quick Preheat	Yes
Self-Clean	2 3 4 Hours
Set Clock	Yes
Start Button	Yes
Timer Function	Yes
Electrical Specifications	
Amps @ 240 Volts	30.38 / 35.25
Connected Load @ 240V	7.9 / 5.9
Min Circuit Required	30A
Connection Location	Left Rear Bottom
Voltage Rating	240V / 208V 60Hz

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca.
Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FGMC3066UD
©2017 Electrolux Home Products, Inc.

Feb 17, 2020
Project: Rathwell Landing
Plan No. 4M-1589
Lot: 298
Model: McCabe 1016