OPTIONAL KITCHEN CABINET CROWN MOULDING, FILLER & BULKHEAD DETAILS

UPC9-1A

- Includes crown moulding & filler detail on upper kitchen cabinetry to standard bulkhead.

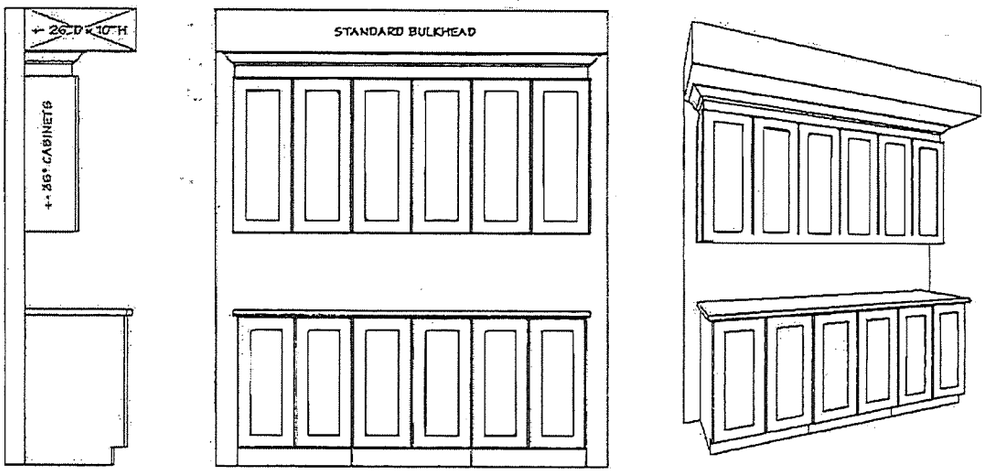

UPC9-2A

- Includes upgrade to 40" uppers with filler detail on upper kitchen cabinetry to standard bulkhead.

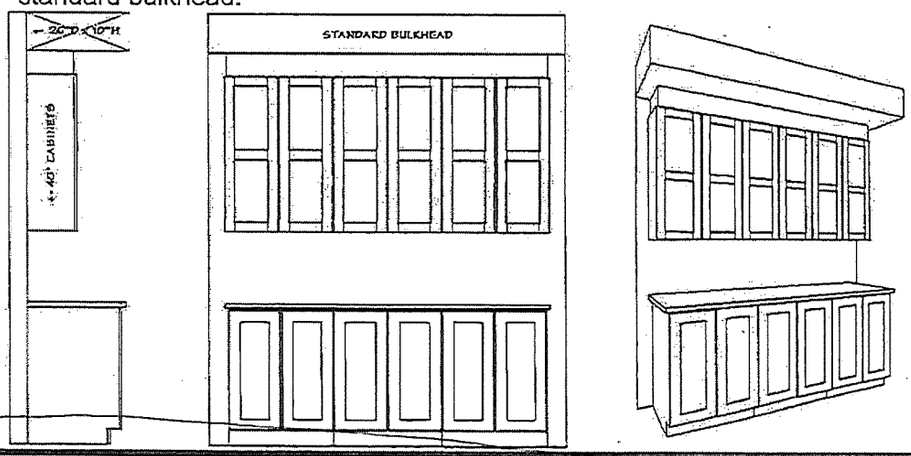

#31

UPC9-2B

- Includes upgrade to ~~40"~~ 42" uppers with filler detail on upper kitchen cabinetry to upgraded bulkhead.

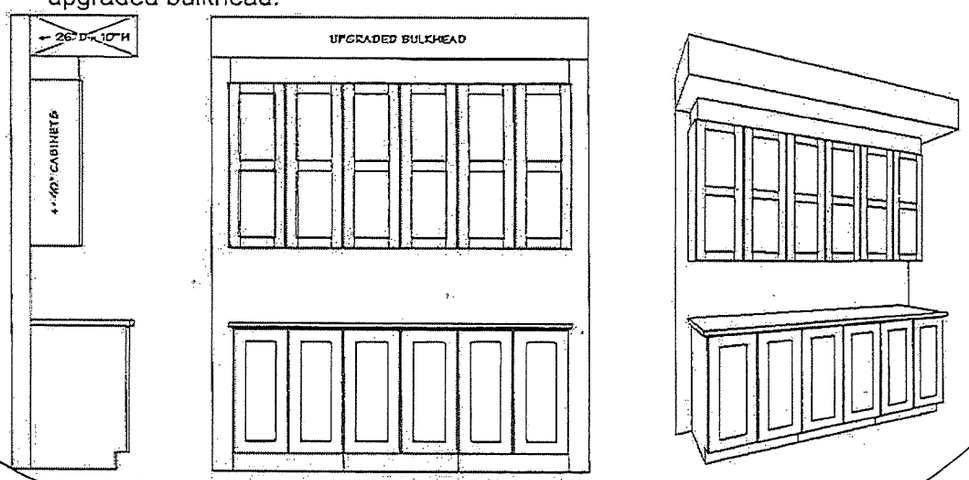

Site: Place St. Thomas 3 Purchaser: _____

Plan No: 50M-338

Lot: 4 - Phase 3 Purchaser: _____

Date: December 22, 2019

orbital
tech integration

Tel: (613) 748-0432
Fax: (613) 748-0355

Estimate No#: OR2954 Rev.03

Customer Copy

Customer:

Builder:	VALECRAFT HOMES (2019) LTD.
Project:	Embrun-Place St Thomas Singles
Lot:	Ph 3
Closing Date:	0004
	09/08/2020
Salesperson:	Jason Thompson (OR)
Date:	12/01/2019

Location	Qty	Product / Installation Details	Plan Code	Unit Price	Customer Total
Great Room	1.00	**(4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets** (4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets - Location as shown on floor plan	1 1 2		
Den	1.00	**(4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets** (4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets - Location as shown on floor plan	1 1 2		
Master Bedroom	1.00	**(4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets** (4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets - Location as shown on floor plan	1 1 2		
Bedroom #2	1.00	**(4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets** (4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets - Location as shown on floor plan	1 1 2		
Bedroom #3	1.00	**(4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets** (4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets - Location as shown on floor plan	1 1 2		
N/A	1.00	**2" PVC Conduit from Basement to Attic** 2" PVC Conduit from Basement to Attic	CONDUIT		
N/A	1.00	**Vacuum Rough-In Outlet** Vacuum Rough-In Outlets	VAC RI		
Great Room	1.00	**Off-Set 2" Conduit w/ Wall Plates** Off-Set 2" Conduit w/ Wall Plates - Location as shown on floor plan - Conduit installed in-wall to conceal wires connected to wall mounted TV - approx 72 inches from floor above fire place beside plug	CONDUIT		

*** Total price does not include any applicable taxes.

Customer Total:

www.orbitalti.com

X ____ X 12/22/2019

X ____ X 12/22/2019

Signature DATE

ELECTRIC - ÉLECTRIQUE

Tel: (613) 748-0432
Fax: (613) 748-0355

A Division of the S&S Bolton Group
www.ssbolton.com

Estimate No#: SS2466 Rev.02

Customer Copy

Customer:

513 Strasbourg Street
Embrun, Ontario
Canada

Builder:	VALECRAFT HOMES (2019) LTD.
Project:	Embrun-Place St Thomas Singles
Lot:	Ph 3
Closing Date:	0004
	09/08/2020
Salesperson:	Jason Thompson
Date:	12/04/2019

Location	Qty	Product / Installation Details	Plan Code	Unit Price	Customer Total
Great Room	1.00	Add 15 AMP recessed plug approx 72 inches from floor above fireplace beside conduit	A		
Kitchen	1.00	Relocate standard kitchen fixture - to be centered in kitchen	B		
Kitchen	1.00	Add 3 keyless fixtures on added switch for future pendant lighting	C		

*** Total price does not include any applicable taxes.

Customer Total:

Customer Signature

12/12/19
Date

12/12/19

www.sandselectric.ca