




see what Delta can do™

KITCHEN FAUCETS

- ☐ Keele™ Pull-Down Kitchen Faucet
- ☐ Single Handle Deck Mount
- ☐ MagnaTite® Magnetic Docking

SUBMITTED MODEL NO.: _____

SPECIFIC FEATURES: _____

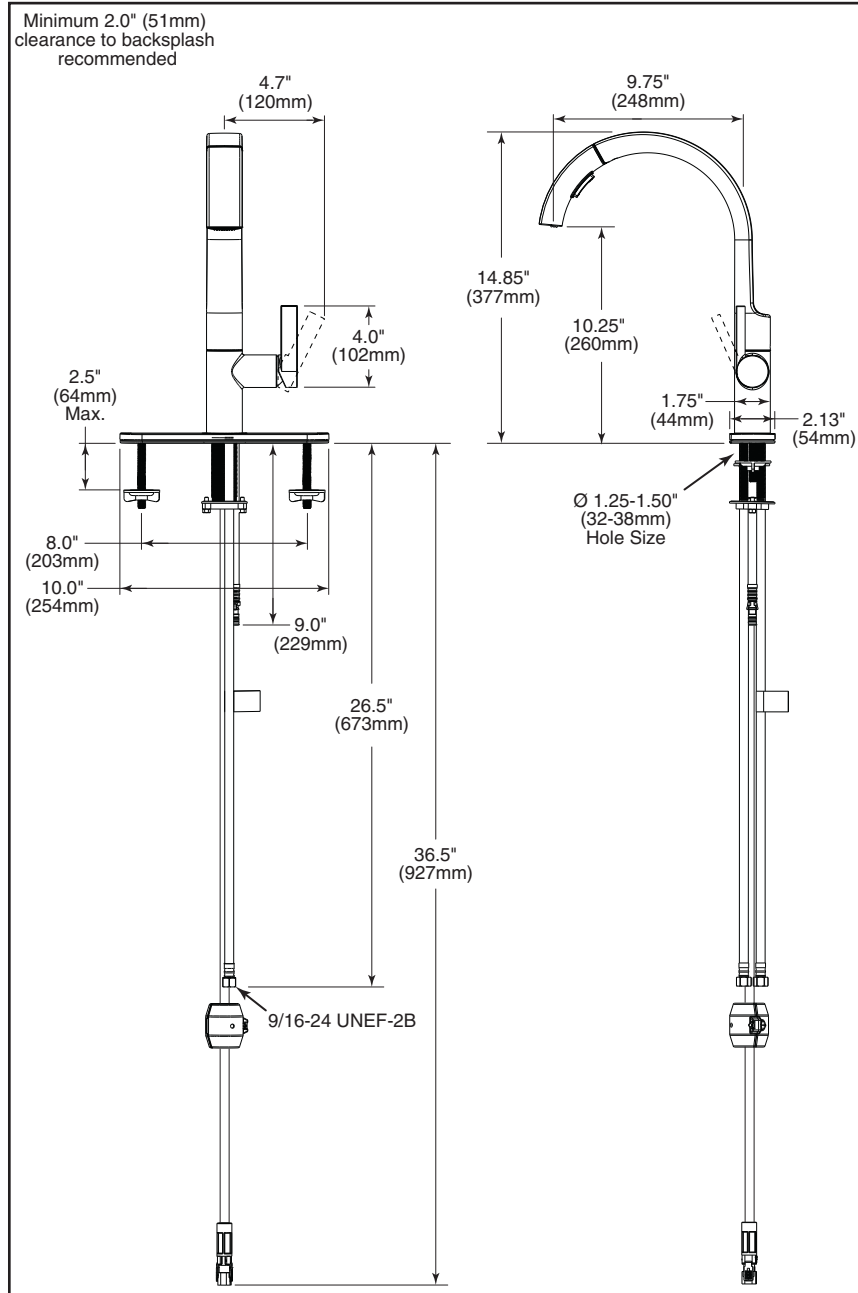

STANDARD SPECIFICATIONS:

- Single handle kitchen faucet
- One or three hole mount (RP63209 Escutcheon optional, not included)
- 8" centres with optional 10" long escutcheon (ordered separately)
- 14.85" (377 mm) high, 9.75" (248 mm) spout length, swings 360°
- Pull-down spout operates in an aerated or spray mode via an easy push toggle button
- MagnaTite magnetic docking
- Touch-Clean spray head
- Quick Snap hose installation
- Dual integral check valves
- Spout is connected to valve body with a 59" (150 cm) long hose
- Ceramic cartridge
- Standard with 3/8" compression
- Maximum flow rate 1.8 gpm @ 60 PSI, 6.8 L/min @ 414 kPa
- Maximum flow rate 1.50 gpm @ 60 psi, 5.7 L/min @ 414 kPa

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Verified compliant with 0.25% weighted average Pb content regulations
- Indicates compliance to ICC/ANSI A117.1

DS Initial
AK

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.

▲ Designate Proper Finish Suffix

Delta Faucet reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.



Delta Faucet Company
350 South Edgeware Road, St. Thomas, ON N5P 4L1
55 E. 111th Street, Indianapolis, IN 46280
© 2023 Delta Faucet Company

DSP-K-940LF, Rev. A

Product Specification Sheet



Virtuo Granite Undermount Single Sink

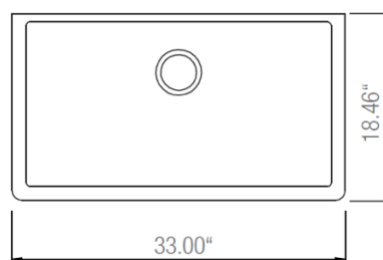B317 - B318 - B319 - B329 - B336


Colour Finish

Model No.

Pearl Back

B317

Coffee Brown

B318

Slate Grey

B319

Asphalt

B329

Stone Taupe


B336

Description

- 33" x 18-1/2" x 9-1/4" Deep
- 80% Quartz Content
- 3 1/2" drain opening
- Supplied with installation clips, template & strainers
- CUPC certified

Available accessories

- Matching Strainer
- Drying Rack
- BG317/318/319/329/336 - Stainless Steel Grid



MAIN LOCATION

BRISTOL SINKS

56 Firestone Blvd
London, Ontario
N5W 6E6

WESTERN LOCATION

BRISTOL SINKS

964 72nd Avenue NE
Calgary, Alberta
T2E 8V9

CONTACT


Tel: 1(800) 930-0214
Fax: 1(866) 310-7580
Email: sales@bristolsinks.com





Submitted Model No.: _____

Specific Features: _____

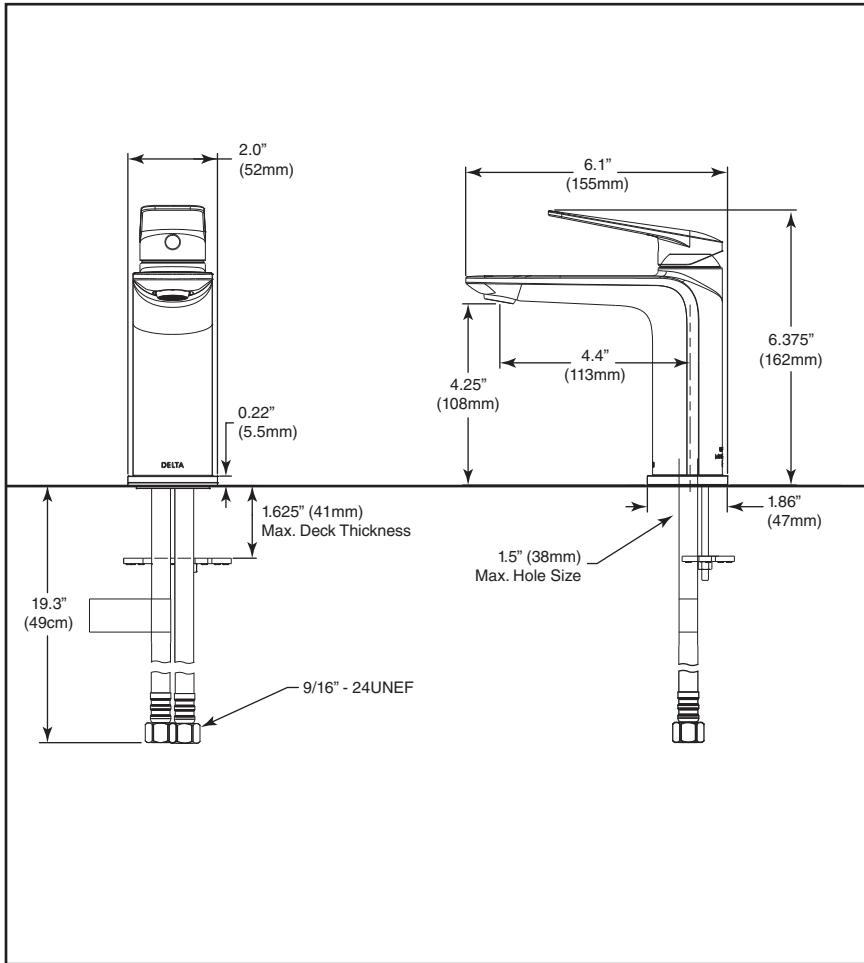

see what Delta can do™

BATHROOM FAUCETS

- Portage™ Bath Family
- Single Handle Deck Mount

STANDARD SPECIFICATIONS:

- **571LF-▲-LPU** - Max flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa (Aerated pressure compensating)
- **571LF-▲-LPU-1.0** - Max flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa (Aerated pressure compensating)
- **571LF-▲-LPU-0.5** - Max flow rate 0.5 gpm @ 60 psi, 1.9 L/min @ 414 kPa (Aerated pressure compensating)
- Standard single hole mount or three hole mount with optional - 6" (152mm) Escutcheon (sold separately)
- 1 5/8" (41mm) max. deck thickness
- Ceramic cartridge
- Red/blue indicator markings
- Metal lever handle
- Solid brass body
- 19" (483mm) long flexible supply lines with 3/8" supply fittings
- Rigid Spout
- Less pop-up, no pop-up hole


OPTIONAL ACCESSORIES:

(sold separately)

- RP101342▲ - 6" (152mm) Escutcheon
- 72173▲ - push pop-up with overflow
- 33W576▲ - push pop-up with overflow holes

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®, applies to 571LF-▲-LPU 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa models only.
- Verified compliant with 0.25% weighted average Pb content regulations
- Indicates compliance to ICC/ANSI A117.1


▲ Designate Proper Finish Suffix

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-L-571LF-LPU, Rev. B

Delta Faucet Company

55 E. 111th Street, Indianapolis, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2020 Delta Faucet Company

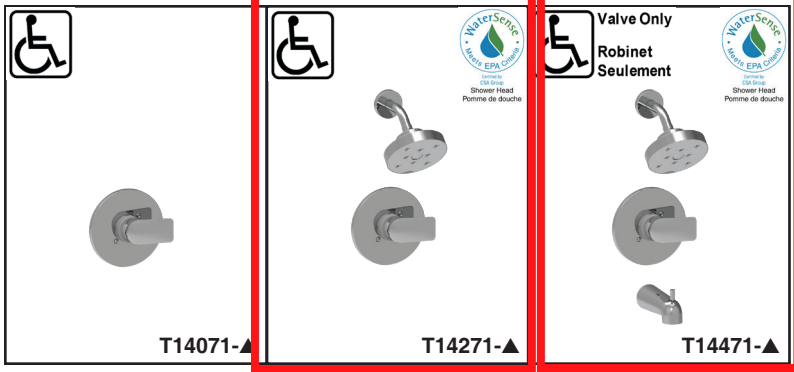


see what Delta can do™

BATHROOM FAUCETS

- Portage™ Bath Collection
- Valve Only (T14071)
- Shower Only (T14271)
- Tub/Shower (T14471)

Submitted Model No.: _____

Specific Features: _____

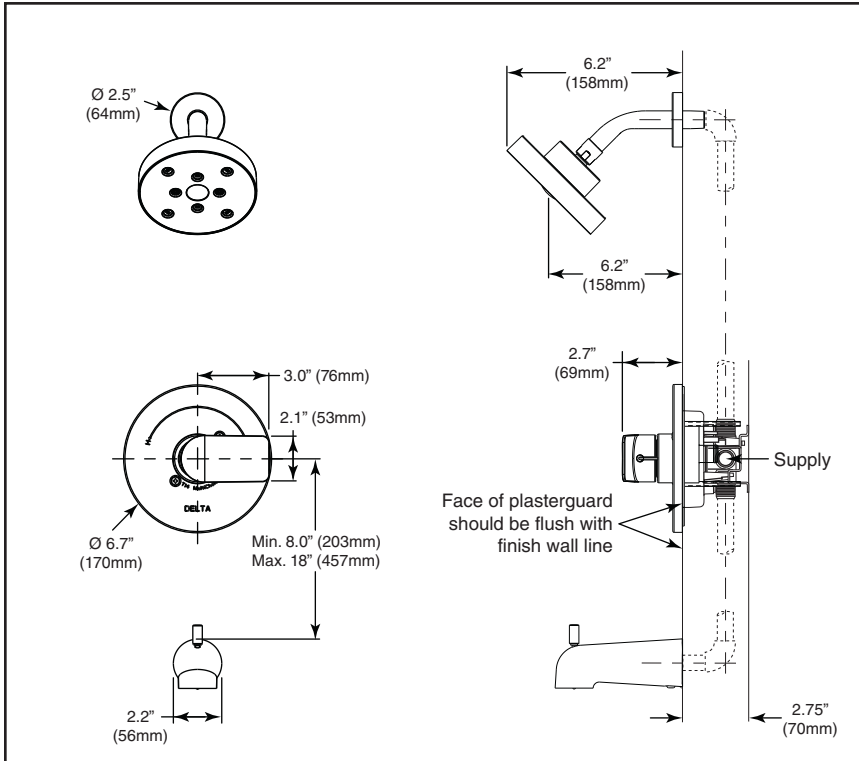

STANDARD SPECIFICATIONS:

- Monitor® 14 Series pressure balanced bath single handle mixing valve trim
- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- For use with MultiChoice® Universal rough valve body (R10000 Series)
- Back-to-back installation capability.
- Temperature only controlled with handle
- Red/blue temperature indicators
- Field adjustable to limit Stop
- 120° maximum handle rotation.
- All parts replaceable from the front of the valve.
- Maximum 1.75gpm @80psi (6.6L/min@ 550kpa)
- Tub port maximum flow rate 6.0gpm @ 60psi with R10000-UNBX
- ½" C.W.T slip-on spout


WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.


RP70175▲




H₂Okinetic® Spray



RP79226 (Chrome, SS Finishes)



RP73371 (BL Finish)



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016
- EPA WaterSense®
- ♿ Indicates compliance to ICC/ANSI A117.1

DS Initial
AK

▲ Designate Proper Finish Suffix

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-T14071, Rev. A

Delta Faucet Company

55 E. 111th Street, Indianapolis, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2020 Delta Faucet Company